

- > Suitable for all cylinder ranges with magnetic piston
- > LED indicator on LSU models
- > Alternative variants allows a wide range of application
- > Switches can be mounted flush with the delivered special adaptor



Technical features

Operation:

M/50/LSU Normally open with LED (yellow)

Switching voltage (Ub):

10 ... 240 V a.c./170 V d.c.

Switching voltage output:

Ub - 2,7 V

Switching current (see graph overleaf):

0,18 A max.

Switching power:

10 W/10 VA max.

Contact resistance:

150 mΩ

Response time:

1,8 ms

Operating temperature:

-25°C ... +80°C (-13°F ... +176°F)

High temperature version:

+150°C max.(+302 °F)

Protection rating (EN 60529):

IP 66

Shock resistance:

50 g (during 11 ms)

Vibration resistance:

35 g (at 2000 Hz)

Cable type:

2 x 0,25: PVC, PUR or silicone

3 x 0,25 PVC

Cable length:

2, 5 or 10 m

Electromagnetic compatibility

according to:



EN 60947-5-2

Materials:

Body: plastic

Cable: see table below

Technical data

Symbol	Voltage		Current maximum (mA)	Function	Operating temperature (°C)	LED	Protection class	Plug	Cable length (m)	Cable type	Weight (g)	Model
	(V a.c.)	(V d.c.)										
 ± BN	10 ... 240	10 ... 170	180	Closer	-25 ... +80	•	IP66	—	2, 5 or 10	PVC 2 x 0,25	37	M/50/LSU/V
	10 ... 240	10 ... 170	180	Closer	-25 ... +80	•	IP66	—	5	PUR 2 x 0,25	37	M/50/LSU/5U
 BN BU	10 ... 240	10 ... 170	180	Closer	-25 ... +150	—	IP66	—	2	Silicon 2 x 0,25	37	TM/50/RAU/2S
 BK BU BN	10 ... 240	10 ... 170	180	Changeover	-25 ... +80	—	IP66	—	5	PVC 3 x 0,25	37	M/50/RAC/5V
 ± BN ~ BK	10 ... 60	10 ... 60	180	Closer	-25 ... +80	•	IP66	M8 x 1	0,3	PVC 3 x 0,25	16	M/50/LSU/CP *1)

* Insert cable length; *1) Plug-in connector see page 2; Color code: BK = black, BN = brown, BU = blue


Options selector

★M/50/★ ★★/★ ★★

Variants	Substitute
High temperature (+150°C)	T
Type	Substitute
Reed with LED	L
Reed without LED	R
Switching voltage	Substitute
Standard	S
Special	A
Function	Substitute
Closer	U
Changeover	C

Cable	Substitute
Silicone	S
PVC	V
PUR	U
Cable length/plug	Substitute
2 m	2
5 m	5
10 m	10
Cable (0,3 m) with plug M8 x 1	CP

Switching current and switching voltage
M/50/LSU, M/50/RAC, M/50/RAU

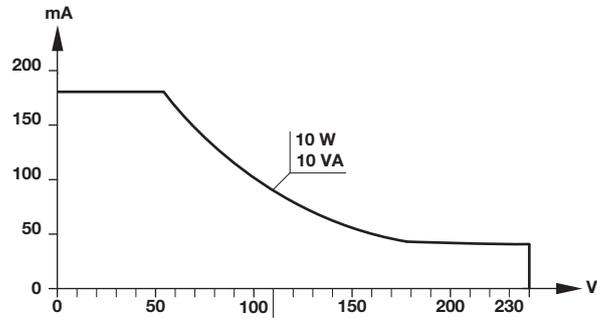

Accessories

Plug-in connector cable with nut



Outer cover	Cable length (m)	Weight (kg)	Connector	Connector
PVC 3 x 0,25	5 m	0,18	M8 x 1	M/P73001/5
PUR 3 x 0,25	5 m	0,18	M8 x 1	M/P73002/5
PUR 3 x 0,34	5 m	0,21	M12 x 1	M/P34594/5

Mounting elements for magnetic switches

Cylinder with external tie rods RA/8000/M, KA/8000/M RA/28000/M, RM/900/M	Roundline cylinder RM/55401/M	Roundline cylinder KM/55001/M, VSM/55640/N2	Roundline cylinder R./57100/M, R./57200/M R./57300/M	Roundline cylinder < 25 mm stroke RM/8000/M, KM/8000/M RM/28000/M	Roundline cylinder > 25 mm stroke RM/8000/M, KM/8000/M RM/28000/M
					

Mounting elements




Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model	Cylinder Ø(mm)	Model
32 ... 200	QM/27/2/1	32	QM/33/432/22	32	QM/33/432/22	10	QM/33/010/22	10	QM/33/010/22	10	QM/33/010/23
		40	QM/33/440/22	40	QM/33/440/22	12	QM/33/012/22	12	QM/33/012/22	12	QM/33/016/23
		50	QM/33/450/22	50	QM/33/450/22	16	QM/33/016/22	16	QM/33/016/22	16	QM/33/016/23
		63	QM/33/463/22	63	QM/33/463/22	20	QM/33/020/22	20	QM/33/020/22	20	QM/33/020/23
		80	QM/33/480/22	80	QM/33/080/22	25	QM/33/025/22	25	QM/33/025/22	25	QM/33/025/23
		100	QM/33/410/22	100	QM/33/100/22	32	QM/33/032/22				
				125	QM/33/125/22	40	QM/33/040/22				
						50	QM/33/050/22				
						63	QM/33/063/22				

Dimensions see relevant cylinder sheets.

Drawings
**M/50/LSU/*V, M/50/LSU/5U,
 TM/50/RAU/2S**
 Cable length L = 2, 5 or 10 m

M/50/RAC/5V
 Cable length L = 5 m

M/50/LSU/CP

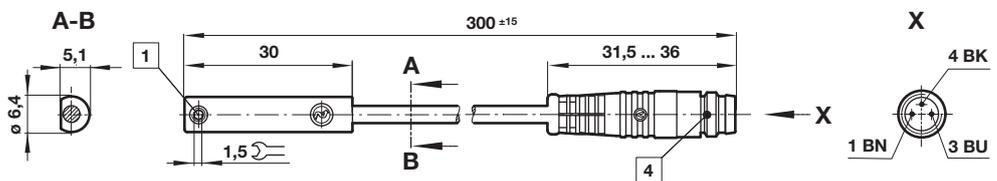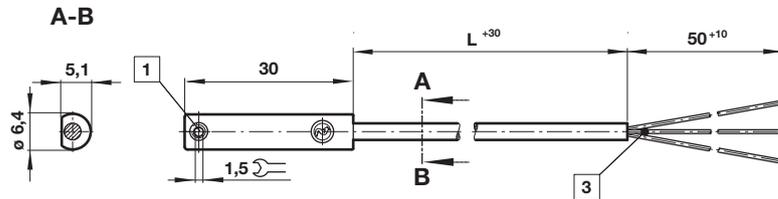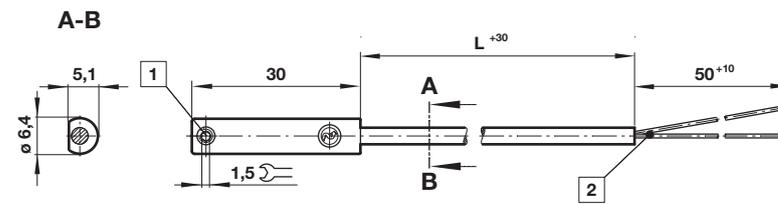 Dimensions in mm
 Projection/First angle


- 1 Fixing screw
- 2 + BN = brown; - BU = blue (output)
- 3 - BK = black; + BN = brown; - BU = blue
- 4 Plug M8 x 1, color code: BK = black; BN = brown; BU = blue

Warning

These products are intended for use in industrial systems only. Do not use these products where values can exceed those listed under »**Technical features/data**«.

Before using these products with non-industrial applications, life-support systems, or other applications not within published specifications, consult NORGREN.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in control systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.

- > Alternative materials allows a wide range of application
- > Switch with plug



Technical features

Operation:

TQM/31, QM/32 normally open with LED (yellow)

Switching voltage (Ub):

10 ... 240 V a.c./d.c.

Switching voltage output:

Ub - 2 V (QM/32)

Switching current (see graph overleaf):

1 A max. (QM/32)

Switching power:

50 W/50 VA max.

Contact resistance:

100 mΩ

Response time:

3 ms

Operating temperature:

-20 ... +80°C (-4 ... +176°F)

High temperature version:

+150°C max. (TQM/31) (+302°F)

Protection rating (EN 60529):

IP 66

Shock resistance:

50 g (during 11 ms)

Vibration resistance:

35 g (50 to 2000 Hz)

Cable type:

PVC 2 x 0,75, PUR 2 x 0,75

VMQ 2 x 0,75 (TQM/31)

Cable length:

2, 5 or 10 m

Electromagnetic compatibility according to:

EN 60947-5-2

Materials:

Body: plastic

Cable: see table below

Technical data

Symbol	Voltage		Current max. (A)	Function	Operating temperature (°C)	LED	Protection class	Features	Cable length (m)	Cable type	Weight (g)	Model
	(V a.c.)	(V d.c.)										
	10 ... 240	10 ... 240	1	Closer	-20 ... +80	•	IP66	—	2, 5 or 10	PVC 2 x 0,75	108 (2 m)	QM/32/*
	10 ... 240	10 ... 240	1	Closer	-20 ... +80	•	IP66	—	2	PUR 2 x 0,75	108	QM/32/2/PU
	10 ... 240	10 ... 240	2	Closer	-20 ... +150	—	IP66	High temperature	2, 5 or 10	Silicon 2 x 0,75	102 (2 m)	TQM/31/*
	10 ... 240	10 ... 240	1	Closer	-20 ... +80	•	IP66	Plug M12 x 1	—	—	15	QM/32/P *1)

* Insert cable length

*1) Plug-in connector see page 2



Color code: BK = black, BN = brown, BU = blue

Options selector

★QM/3★/★/★/★

Variants	Substitute	Cable	Substitute
High temperature (+150°C), for TQM/31/* only	T	PVC	Without
Type	Substitute	PUR	PU
Reed with LED	2	Cable length/plug	Substitute
Reed without LED, for TQM/31/* only	1	2 m	2
		5 m	5
		10 m	10
		With plug	Substitute
		M12 x 1	P

Switching current and switching voltage

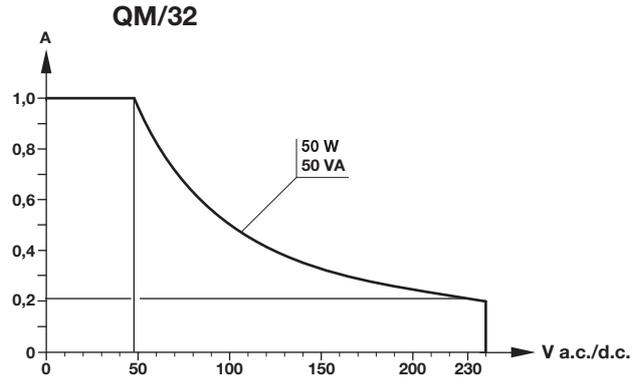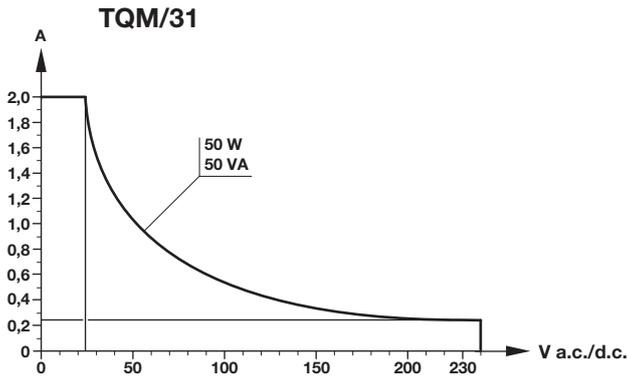

Mounting elements for magnetic switches

Cylinder with external tie rods
RA/8000/M, RA/28000/M

Mounting elements

Cylinder with external tie rods
RM/900/M

Mounting elements

Cylinder Ø (mm)	Model	Cylinder Ø (inch)	Model
32 ... 63	QM/31/032/22	1 1/4"	QM/31/032/22
80 ... 125	QM/31/080/22	1 3/4" + 2"	QM/31/080/22
160 + 200	QM/31/160/22	2 1/2" ... 4"	QM/31/2/22
250	QM/31/250/22		
320	QM/31/320/22		


Dimensions see relevant cylinder sheets.

Accessories


Plug-in connector cable with nut

Outer cover	Cable length	Weight (kg)	Connector	Model
PVC 3 x 0,34	5 m	0,182	M12 x 1	MP34692/5
PUR 3 x 0,34	5 m	0,182	M12 x 1	MP34594/5

Dimensions
TQM/31, QM/32

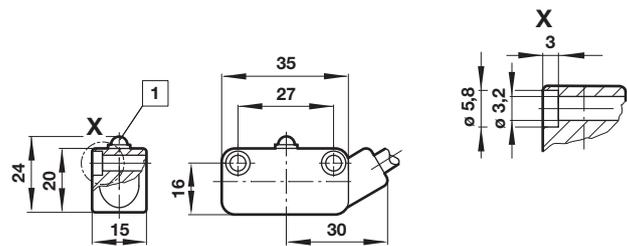

QM/32/P

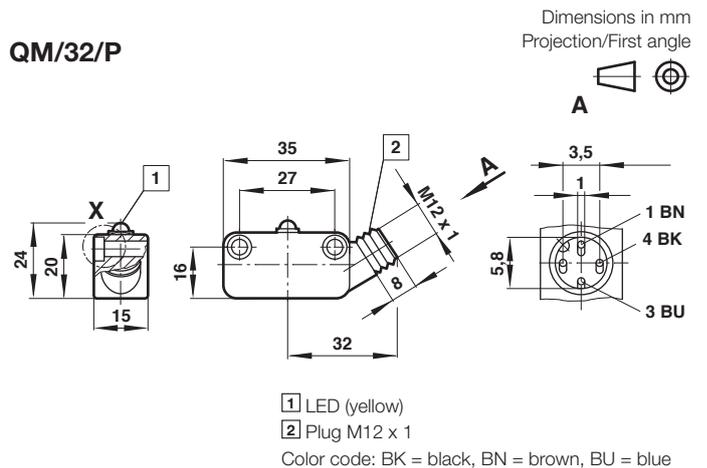

Warning

These products are intended for use in industrial systems only. Do not use these products where values can exceed those listed under »**Technical features/data**«.

Before using these products with non-industrial applications, life-support systems, or other applications not within published specifications, consult NORGREN.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in control systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.