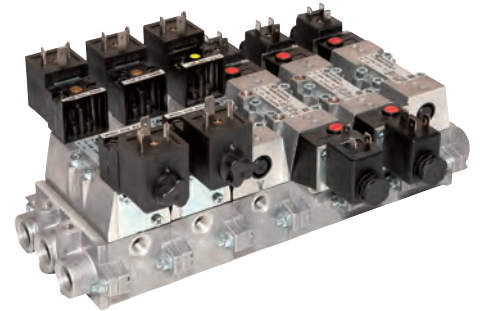


ISO*STAR (SXE, SXP) 5/2 & 5/3

Solenoid and pilot actuated glandless spool valves

- Sub-base mounted, ISO 5599-1 sizes 1, 2 or 3
- Specially coated glandless spool and sleeve for long trouble-free life
- Integral flow regulators available on ISO 1 and 2 sizes for cylinder speed control
- Low power solenoids feature
- Manual override as standard
- Impulse actuated bistable valve with detent mechanism
- Wide range of sub-bases and accessories
- It is possible to create valve and solenoid combinations which have Ex protection class ATEX (categories II 2 GD and II 3 GD) and other international approvals



Technical features

Medium:

Compressed air, 40 µm filtered, lubricated or non-lubricated

Operation:

Glandless spool valve, Solenoid pilot or Air pilotactuated

Mounting:

On sub-bases

Sizes:

ISO 1, 2 and 3

Maximum operating pressure:

Standard:
Solenoid valves; 10 (145 psi) or 16 bar (232 psi) depending on Solenoid pilot operator
Air pilotoperated valves; 16 bar (232 psi)
Refer to technical specification table for details
ATEX:
10 bar (145 psi) Solenoid pilot actuated valves
16 bar (232 psi) Air pilotactuated valves and Solenoid pilot actuated valves with external pilot supply.
Details of minimum and maximum pilot pressure see overleaf

Ambient/Media temperature:

Standard:
Solenoid pilot actuated valves
-15 ... +50°C (+5 ... 122°F)
Air pilotactuated valves
-15 ... +80°C (+5 ... 176°F)
ATEX:
Air pilotand Solenoid pilot actuated valves.
-15 ... +50°C (+5 ... +122°F)
Air supply must be dry enough to avoid ice formation at temperatures below +2°C (+35°F).

Materials:

Body: die-cast aluminium
Spool & sleeve: hard anodised aluminium with special PTFE coating
Seals: NBR
Locking plate: die-cast zinc or steel blue zinc coated
Screws: steel, blue zinc coated
Plastic parts: POM
Flow regulators: brass

Electrical details for solenoid operators

Voltage tolerance	± 10%	
Rating	100% continuous duty	
Inlet orifice	1,0 mm	
Electrical connection (corresponding to choosen coil)	EN 175301-803 - Form A, 30 mm	
	EN 175301-803 - Form B, 22 mm	
	Industrial Standard, 22 mm	
Solenoid coil mounting	Four positions x 90°	
Manual override	End solenoid models	Push and turn to lock (plastic)
		Push only (plastic)
	CNOMO solenoid models	Push and turn to lock (plastic)
		Push only (brass)
Protection class	IP 65 (with sealed plug)	

Maximum suggested torque

Valve size	Thread size	Maximum suggested torque
ISO 1	M5	3.1 Nm
ISO 2	M6	3.5 Nm
ISO 3	M8	5.6 Nm

Important Safety Notice

This datasheet covers ISO*STAR valve assemblies approved for use in both ATEX and non-ATEX environments. To maintain safety and compliance, always follow the datasheet technical guidelines specifying which valve bodies and coils combinations are suitable to be used in ATEX environments. Below is a quick reference guide showing which valve bodies, coils, and connector plugs can be used in ATEX or non-ATEX environments.

Valve assemblies to be used in non-ATEX zones Bodies (non-ATEX certified)

Valve function	Actuation	Pressure (bar)	Part number*	Page number
5/2	Solenoid pilot	10	SXE957-...	2
5/2	Solenoid pilot	10	SXE057-...	2
5/2	Solenoid pilot	10	SXE157-...	2
5/3	Solenoid pilot	10	SXE967-...	3
5/3	Solenoid pilot	10	SXE977-...	3
5/3	Solenoid pilot	10	SXE987-...	3
5/2	Solenoid pilot	16	SXE957-...	4
5/2	Solenoid pilot	16	SXE057-...	4
5/2	Solenoid pilot	16	SXE157-...	4
5/3	Solenoid pilot	16	SXE967-...	5
5/3	Solenoid pilot	16	SXE977-...	5
5/3	Solenoid pilot	16	SXE987-...	5
5/2	Air pilot	16	SXP957-...	6
5/2	Air pilot	16	SXP057-...	6
5/2	Air pilot	16	SXP157-...	6
5/3	Air pilot	16	SXP967-...	6
5/3	Air pilot	16	SXP977-...	6
5/3	Air pilot	16	SXP987-...	6
5/2	Solenoid pilot	10	SXE957-... (Classic range)	8
5/2	Solenoid pilot	10	SXE057-... (Classic range)	8
5/3	Solenoid pilot	10	SXE967-... (Classic range)	9
5/3	Solenoid pilot	10	SXE977-... (Classic range)	9
5/3	Solenoid pilot	10	SXE987-... (Classic range)	9

Coils (non-ATEX certified)

Pressure (bar)	Part number*	Page number*
10	QM/48...	3
10	V10633...	3
10	V10626...	3
10	V10633...	6
10	TM1... (Classic range)	10

Connector plugs (non-ATEX certified)

Pressure (bar)	Part number*	Page number
10	06578680000000	4
10	06800030000000	4
10	05702750000000	4
10	05702750000000	7
10	06578680000000 (Classic range)	10
10	05702750000000 (Classic range)	10

Valve assemblies which can be used in ATEX zones (following risk assessment carried out by the customer according to EN ISO 80079-36) Bodies (non-ATEX certified)

Valve function	Actuation	Pressure (bar)	Part number*	Page number
5/2	Solenoid pilot	10	SXE957-...	8
5/2	Solenoid pilot	10	SEX057-...	8
5/3	Solenoid pilot	10	SXE967-...	9
5/3	Solenoid pilot	10	SXE977-...	9
5/3	Solenoid pilot	10	SXE987-...	9

ATEX certified coils

Part number*	Page number
0000000306...	14
0000000304...	14

* Please check the the specified page in the table for the full part number and other informations.

Valves for non-ATEX environments








Important Information

This section of the datasheet covers ISO*STAR valve assemblies intended for use in non-ATEX environments.

To ensure compliance and safety, use only the valve bodies and coils listed here and follow all technical recommendations carefully.

Solenoid actuated valves - 10 bar valve bodies

5/2 Solenoid pilot actuated valves - 10 bar Solenoid pilot pressure

Symbol	ISO size	Flow regulator	Actuation	Pilot supply	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model End solenoid actuated valves	CNOMO solenoid actuated valves
	1	—	Solenoid/air spring	Internal	1230	1 ... 10	—	0,33	1 6 3	SXE9573-A70-0#-***1	SXE9573-Z70-6#-***1
	2	—	Solenoid/air spring	Internal	2450	1 ... 10	—	0,59	1 6 3	SXE9574-A70-0#-***1	SXE9574-Z70-6#-***1
	3	—	Solenoid/air spring	Internal	4400	1 ... 10	—	0,85	1 6 3	SXE9575-A70-0#-***1	SXE9575-Z70-6#-***1
	1	Built-in	Solenoid/air spring	Internal	1230	1 ... 10	—	0,33	1 6 3	SXE9573-A80-0#-***1	SXE9573-Z80-6#-***1
	2	Built-in	Solenoid/air spring	Internal	2450	1 ... 10	—	0,59	1 6 3	SXE9574-A80-0#-***1	SXE9574-Z80-6#-***1
	1	—	Solenoid/air spring	External *3)	1230	-0,9 ... 16	1 ... 10	0,33	1 6 3	SXE9573-A75-0#-***1	SXE9573-Z75-6#-***1
	1	Built-in	Solenoid/air spring	External *3)	1230	-0,9 ... 16	1 ... 10	0,33	1 6 3	SXE9573-A85-0#-***1	SXE9573-Z85-6#-***1
	2	—	Solenoid/air spring	External *3)	2450	-0,9 ... 16	1 ... 10	0,59	1 6 3	SXE9574-A75-0#-***1	SXE9574-Z75-6#-***1
	3	—	Solenoid/air spring	External *3)	4400	-0,9 ... 16	1 ... 10	0,85	1 6 3	SXE9575-A75-0#-***1	SXE9575-Z75-6#-***1
	2	Built-in	Solenoid/air spring	External *3)	2450	-0,9 ... 16	1 ... 10	0,59	1 6 3	SXE9574-A85-0#-***1	SXE9574-Z85-6#-***1
	1	—	Solenoid/spring	Internal	1230	1,8 ... 10	—	0,33	1 6 3	SXE9573-A71-0#-***1	SXE9573-Z71-6#-***1
	2	—	Solenoid/spring	Internal	2450	1,8 ... 10	—	0,59	1 6 3	SXE9574-A71-0#-***1	SXE9574-Z71-6#-***1
	3	—	Solenoid/spring	Internal	4400	1,8 ... 10	—	0,85	1 6 3	SXE9575-A71-0#-***1	SXE9575-Z71-6#-***1
	1	Built-in	Solenoid/spring	Internal	1230	1,8 ... 10	—	0,33	1 6 3	SXE9573-A81-0#-***1	SXE9573-Z81-6#-***1
	2	Built-in	Solenoid/spring	Internal	2450	1,8 ... 10	—	0,59	1 6 3	SXE9574-A81-0#-***1	SXE9574-Z81-6#-***1
	1	—	Solenoid/spring	External *3)	1230	-0,9 ... 16	1,8 ... 10	0,33	1 6 3	SXE9573-A76-0#-***1	SXE9573-Z76-6#-***1
	2	—	Solenoid/spring	External *3)	2450	-0,9 ... 16	1,8 ... 10	0,59	1 6 3	SXE9574-A76-0#-***1	SXE9574-Z76-6#-***1
	3	—	Solenoid/spring	External *3)	4400	-0,9 ... 16	1,8 ... 10	0,85	1 6 3	SXE9575-A76-0#-***1	SXE9575-Z76-6#-***1
	1	Built-in	Solenoid/spring	External *3)	1230	-0,9 ... 16	1,8 ... 10	0,33	1 6 3	SXE9573-A86-0#-***1	SXE9573-Z86-6#-***1
	2	Built-in	Solenoid/spring	External *3)	2450	-0,9 ... 16	1,8 ... 10	0,59	1 6 3	SXE9574-A86-0#-***1	SXE9574-Z86-6#-***1
	1	—	Solenoid/solenoid	Internal	1230	2 ... 10	—	0,45	2 6 4	SXE0573-A50-0#-***1	SXE0573-Z50-6#-***1
	2	—	Solenoid/solenoid	Internal	2450	2 ... 10	—	0,72	2 6 4	SXE0574-A50-0#-***1	SXE0574-Z50-6#-***1
	3	—	Solenoid/solenoid	Internal	4400	2 ... 10	—	0,96	2 6 4	SXE0575-A50-0#-***1	SXE0575-Z50-6#-***1
	1	Built-in	Solenoid/solenoid	Internal	1230	2 ... 10	—	0,45	2 6 4	SXE0573-A60-0#-***1	SXE0573-Z60-6#-***1
	2	Built-in	Solenoid/solenoid	Internal	2450	2 ... 10	—	0,72	2 6 4	SXE0574-A60-0#-***1	SXE0574-Z60-6#-***1
	1	—	Solenoid/solenoid	External *3)	1230	-0,9 ... 16	2 ... 10	0,45	2 6 4	SXE0573-A55-0#-***1	SXE0573-Z55-6#-***1
	2	—	Solenoid/solenoid	External *3)	2450	-0,9 ... 16	2 ... 10	0,72	2 6 4	SXE0574-A55-0#-***1	SXE0574-Z55-6#-***1
	3	—	Solenoid/solenoid	External *3)	4400	-0,9 ... 16	2 ... 10	0,96	2 6 4	SXE0575-A55-0#-***1	SXE0575-Z55-6#-***1
	1	Built-in	Solenoid/solenoid	External *3)	1230	-0,9 ... 16	2 ... 10	0,45	2 6 4	SXE0573-A65-0#-***1	SXE0573-Z65-6#-***1
	2	Built-in	Solenoid/solenoid	External *3)	2450	-0,9 ... 16	2 ... 10	0,72	2 6 4	SXE0574-A65-0#-***1	SXE0574-Z65-6#-***1
	1	—	Solenoid/solenoid *2)	Internal	1230	2 ... 10	—	0,45	2 6 4	—	SXE1573-Z50-6#-***1
	2	—	Solenoid/solenoid *2)	Internal	2450	2 ... 10	—	0,72	2 6 4	—	SXE1574-Z50-6#-***1
	3	—	Solenoid/solenoid *2)	Internal	4400	2 ... 10	—	0,96	2 6 4	—	SXE1575-Z50-6#-***1
	1	—	Solenoid/solenoid *2)	External *3)	1230	-0,9 ... 16	2 ... 10	0,45	2 6 4	—	SXE1573-Z55-6#-***1
	2	—	Solenoid/solenoid *2)	External *3)	2450	-0,9 ... 16	2 ... 10	0,72	2 6 4	—	SXE1574-Z55-6#-***1
	3	—	Solenoid/solenoid *2)	External *3)	4400	-0,9 ... 16	2 ... 10	0,96	2 6 4	—	SXE1575-Z55-6#-***1

Insert code for manual override: 0 = push and turn (standard - End solenoid), 1 = push only






***1) Insert voltage code from tables below for the coil version i.e. 13J

Without coil please add a "K" after the manual override (#), the item number ends here - i.e. - SXE0574-A65-0#K (end solenoid) - SXE1575-Z50-6#K (CNOMO solenoid)

*2) Pilot side 14 priority

*3) External pilot supply for ISO1 at port 14 only; ISO2 and ISO3 at port 12 or 14 (unconnected port 12 or 14 has to be plugged).

5/3 Solenoid pilot actuated valves - 10 bar Solenoid pilot pressure

Symbol	ISO size	Flow regulator	Actuation	Function	Pilot supply	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model End solenoid actuated valves	CNOMO solenoid actuated valves
	1	–	Solenoid/solenoid	APB	Internal	1320	2 ... 10	–	0,45	2 6 4	SXE9673-A50-0#-***1)	SXE9673-Z50-6#-***1)
	2	–	Solenoid/solenoid	APB	Internal	2520	2 ... 10	–	0,72	2 6 4	SXE9674-A50-0#-***1)	SXE9674-Z50-6#-***1)
	3	–	Solenoid/solenoid	APB	Internal	4650	2 ... 10	–	0,96	2 6 4	SXE9675-A50-0#-***1)	SXE9675-Z50-6#-***1)
	1	Built-in	Solenoid/solenoid	APB	Internal	1320	2 ... 10	–	0,45	2 6 4	SXE9673-A60-0#-***1)	SXE9673-Z60-6#-***1)
	2	Built-in	Solenoid/solenoid	APB	Internal	2520	2 ... 10	–	0,72	2 6 4	SXE9674-A60-0#-***1)	SXE9674-Z60-6#-***1)
	3	–	Solenoid/solenoid	APB	External *3)	4650	2 ... 10	–	0,96	2 6 4	SXE9675-A60-0#-***1)	SXE9675-Z60-6#-***1)
	1	–	Solenoid/solenoid	APB	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2 6 4	SXE9673-A55-0#-***1)	SXE9673-Z55-6#-***1)
	2	–	Solenoid/solenoid	APB	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2 6 4	SXE9674-A55-0#-***1)	SXE9674-Z55-6#-***1)
	3	–	Solenoid/solenoid	APB	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2 6 4	SXE9675-A55-0#-***1)	SXE9675-Z55-6#-***1)
	1	Built-in	Solenoid/solenoid	APB	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2 6 4	SXE9673-A65-0#-***1)	SXE9673-Z65-6#-***1)
	2	Built-in	Solenoid/solenoid	APB	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2 6 4	SXE9674-A65-0#-***1)	SXE9674-Z65-6#-***1)
	3	–	Solenoid/solenoid	APB	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2 6 4	SXE9675-A65-0#-***1)	SXE9675-Z65-6#-***1)
	1	–	Solenoid/solenoid	COE	Internal	1320	2 ... 10	–	0,45	2 6 4	SXE9773-A50-0#-***1)	SXE9773-Z50-6#-***1)
	2	–	Solenoid/solenoid	COE	Internal	2520	2 ... 10	–	0,72	2 6 4	SXE9774-A50-0#-***1)	SXE9774-Z50-6#-***1)
	3	–	Solenoid/solenoid	COE	Internal	4650	2 ... 10	–	0,96	2 6 4	SXE9775-A50-0#-***1)	SXE9775-Z50-6#-***1)
	1	Built-in	Solenoid/solenoid	COE	Internal	1320	2 ... 10	–	0,45	2 6 4	SXE9773-A60-0#-***1)	SXE9773-Z60-6#-***1)
	2	Built-in	Solenoid/solenoid	COE	Internal	2520	2 ... 10	–	0,72	2 6 4	SXE9774-A60-0#-***1)	SXE9774-Z60-6#-***1)
	3	–	Solenoid/solenoid	COE	External *3)	4650	2 ... 10	–	0,96	2 6 4	SXE9775-A60-0#-***1)	SXE9775-Z60-6#-***1)
	1	–	Solenoid/solenoid	COE	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2 6 4	SXE9773-A55-0#-***1)	SXE9773-Z55-6#-***1)
	2	–	Solenoid/solenoid	COE	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2 6 4	SXE9774-A55-0#-***1)	SXE9774-Z55-6#-***1)
	3	–	Solenoid/solenoid	COE	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2 6 4	SXE9775-A55-0#-***1)	SXE9775-Z55-6#-***1)
	1	Built-in	Solenoid/solenoid	COE	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2 6 4	SXE9673-A65-0#-***1)	SXE9673-Z65-6#-***1)
	2	Built-in	Solenoid/solenoid	COE	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2 6 4	SXE9674-A65-0#-***1)	SXE9674-Z65-6#-***1)
	3	–	Solenoid/solenoid	COE	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2 6 4	SXE9675-A65-0#-***1)	SXE9675-Z65-6#-***1)
	1	–	Solenoid/solenoid	COP	Internal	1320	2 ... 10	–	0,45	2 6 4	SXE9873-A50-0#-***1)	SXE9873-Z50-6#-***1)
	2	–	Solenoid/solenoid	COP	Internal	2520	2 ... 10	–	0,72	2 6 4	SXE9874-A50-0#-***1)	SXE9874-Z50-6#-***1)
	3	–	Solenoid/solenoid	COP	Internal	4650	2 ... 10	–	0,96	2 6 4	SXE9875-A50-0#-***1)	SXE9875-Z50-6#-***1)
	1	Built-in	Solenoid/solenoid	COP	Internal	1320	2 ... 10	–	0,45	2 6 4	SXE9873-A60-0#-***1)	SXE9873-Z60-6#-***1)
	2	Built-in	Solenoid/solenoid	COP	Internal	2520	2 ... 10	–	0,72	2 6 4	SXE9874-A60-0#-***1)	SXE9874-Z60-6#-***1)
	3	–	Solenoid/solenoid	COP	External *3)	4650	2 ... 10	–	0,96	2 6 4	SXE9875-A60-0#-***1)	SXE9875-Z60-6#-***1)
	1	–	Solenoid/solenoid	COP	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2 6 4	SXE9873-A55-0#-***1)	SXE9873-Z55-6#-***1)
	2	–	Solenoid/solenoid	COP	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2 6 4	SXE9874-A55-0#-***1)	SXE9874-Z55-6#-***1)
	3	–	Solenoid/solenoid	COP	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2 6 4	SXE9875-A55-0#-***1)	SXE9875-Z55-6#-***1)
	1	Built-in	Solenoid/solenoid	COP	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2 6 4	SXE9873-A65-0#-***1)	SXE9873-Z65-6#-***1)
	2	Built-in	Solenoid/solenoid	COP	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2 6 4	SXE9874-A65-0#-***1)	SXE9874-Z65-6#-***1)
	3	–	Solenoid/solenoid	COP	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2 6 4	SXE9875-A65-0#-***1)	SXE9875-Z65-6#-***1)

Insert code for manual override: 0 = push and turn (standard - End solenoid), 1 = push only

***1) Insert voltage code from tables below for the coil version i.e. 13J

Without coil please add a "K" after the manual override (#), the item number ends here - i.e. - SXE0574-A65-0#K (end solenoid) - SXE1575-Z50-6#K (CNOMO solenoid)

*3) External pilot supply for ISO1 at port 14 only; ISO2 and ISO3 at port 12 or 14 (unconnected port 12 or 14 has to be plugged).

Valve function: APB = All Ports Blocked; COE = Centre Open Exhaust; COP = Centre Open Pressure

10 bar Valve coils

Voltage codes and spare coils for 10 bar models (End & CNOMO solenoid operator)

22 mm coil for connector interface acc. to industrial standard				
	Voltage	Power Inrush/Hold	Model	Code
	12 V d.c.	2 W	QM/48/12J/21	12J
	24 V d.c.	2 W	QM/48/13J/21	13J
	24 V 50/60 Hz	4/2,5 VA	QM/48/14J/21	14J
	48 V 50/60 Hz	4/2,5 VA	QM/48/16J/21	16J
	110/120 V 50/60 Hz	4/2,5 VA	QM/48/18J/21	18J
	220/240 V 50/60 Hz	6/5,0 VA	QM/48/19J/21	19J

22 mm coil for connector interface acc. EN 175 301-803, form B				
	Voltage	Power Inrush/Hold	Model	Code
	12 V d.c.	2 W	V10626-A12L	12L
	24 V d.c.	2 W	V10626-A13L	13L
	24 V 50/60 Hz	4/2,5 VA	V10626-A14L	14L
	48 V 50/60 Hz	4/2,5 VA	V10626-A16L	16L
	110/120 V 50/60 Hz	4/2,5 VA	V10626-A18L	18L
	220/240 V 50/60 Hz	6/5,0 VA	V10626-A19L	19L









Connector plugs - ordered separately

30 mm coil for connector interface acc. EN 175 301-803, form A				
	Voltage	Power Inrush/Hold	Model	Code
	12 V d.c.	1,5 W	V10633-A22N	22N
	24 V d.c.	1,5 W	V10633-A23N	23N
	24 V 50/60 Hz	3/2 VA	V10633-A24N	24N
	48 V 50/60 Hz	3/2 VA	V10633-A26N	26N
	110/120 V 50/60 Hz	3/2 VA	V10633-A28N	28N
	220/240 V 50/60 Hz	3/2 VA	V10633-A29N	29N

Industrial standard 22 mm 2-pole + PE	22 mm, EN 175301-803 (DIN 43650 B) Form B 2-pole + PE	30 mm, EN 175301-803 (DIN 43650 B) Form A 2-pole + PE
		
0657868000000000	0680003000000000	0570275000000000

Solenoid actuated valves - 16 bar valve bodies

5/2 Solenoid pilot actuated valves – 16 bar solenoid Solenoid pilot pressure

Symbol	ISO size	Flow regulator	Actuation	Pilot supply	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model CNOMO solenoid actuated valves
	1	—	Solenoid/air spring	Internal	1230	1 ... 16	—	0,33	1 & 3	SXE9573-Z70-8#-***1)
	2	—	Solenoid/air spring	Internal	2450	1 ... 16	—	0,59	1 & 3	SXE9574-Z70-8#-***1)
	3	—	Solenoid/air spring	Internal	4400	1 ... 16	—	0,85	1 & 3	SXE9575-Z70-8#-***1)
	1	Built-in	Solenoid/air spring	Internal	1230	1 ... 16	—	0,33	1 & 3	SXE9573-Z80-8#-***1)
	2	Built-in	Solenoid/air spring	Internal	2450	1 ... 16	—	0,59	1 & 3	SXE9574-Z80-8#-***1)
	1	—	Solenoid/air spring	External *3)	1230	-0,9 ... 16	1 ... 16	0,33	1 & 3	SXE9573-Z75-8#-***1)
	1	Built-in	Solenoid/air spring	External *3)	1230	-0,9 ... 16	1 ... 16	0,33	1 & 3	SXE9573-Z85-8#-***1)
	2	—	Solenoid/air spring	External *3)	2450	-0,9 ... 16	1 ... 16	0,59	1 & 3	SXE9574-Z75-8#-***1)
	3	—	Solenoid/air spring	External *3)	4400	-0,9 ... 16	1 ... 16	0,85	1 & 3	SXE9575-Z75-8#-***1)
	2	Built-in	Solenoid/air spring	External *3)	2450	-0,9 ... 16	1 ... 16	0,59	1 & 3	SXE9574-Z85-8#-***1)
	1	—	Solenoid/spring	Internal	1230	1,8 ... 16	—	0,33	1 & 3	SXE9573-Z71-8#-***1)
	2	—	Solenoid/spring	Internal	2450	1,8 ... 16	—	0,59	1 & 3	SXE9574-Z71-8#-***1)
	3	—	Solenoid/spring	Internal	4400	1,8 ... 16	—	0,85	1 & 3	SXE9575-Z71-8#-***1)
	1	Built-in	Solenoid/spring	Internal	1230	1,8 ... 16	—	0,33	1 & 3	SXE9573-Z81-8#-***1)
	2	Built-in	Solenoid/spring	Internal	2450	1,8 ... 16	—	0,59	1 & 3	SXE9574-Z81-8#-***1)
	1	—	Solenoid/spring	External *3)	1230	-0,9 ... 16	1,8 ... 16	0,33	1 & 3	SXE9573-Z76-8#-***1)
	2	—	Solenoid/spring	External *3)	2450	-0,9 ... 16	1,8 ... 16	0,59	1 & 3	SXE9574-Z76-8#-***1)
	3	—	Solenoid/spring	External *3)	4400	-0,9 ... 16	1,8 ... 16	0,85	1 & 3	SXE9575-Z76-8#-***1)
	1	Built-in	Solenoid/spring	External *3)	1230	-0,9 ... 16	1,8 ... 16	0,33	1 & 3	SXE9573-Z86-8#-***1)
	2	Built-in	Solenoid/spring	External *3)	2450	-0,9 ... 16	1,8 ... 16	0,59	1 & 3	SXE9574-Z86-8#-***1)
	1	—	Solenoid/solenoid	Internal	1230	2 ... 16	—	0,45	2 & 4	SXE0573-Z50-8#-***1)
	2	—	Solenoid/solenoid	Internal	2450	2 ... 16	—	0,72	2 & 4	SXE0574-Z50-8#-***1)
	3	—	Solenoid/solenoid	Internal	4400	2 ... 16	—	0,96	2 & 4	SXE0575-Z50-8#-***1)
	1	Built-in	Solenoid/solenoid	Internal	1230	2 ... 16	—	0,45	2 & 4	SXE0573-Z60-8#-***1)
	2	Built-in	Solenoid/solenoid	Internal	2450	2 ... 16	—	0,72	2 & 4	SXE0574-Z60-8#-***1)
	1	—	Solenoid/solenoid	External *3)	1230	-0,9 ... 16	2 ... 16	0,45	2 & 4	SXE0573-Z55-8#-***1)
	2	—	Solenoid/solenoid	External *3)	2450	-0,9 ... 16	2 ... 16	0,72	2 & 4	SXE0574-Z55-8#-***1)
	3	—	Solenoid/solenoid	External *3)	4400	-0,9 ... 16	2 ... 16	0,96	2 & 4	SXE0575-Z55-8#-***1)
	1	Built-in	Solenoid/solenoid	External *3)	1230	-0,9 ... 16	2 ... 16	0,45	2 & 4	SXE0573-Z65-8#-***1)
	2	Built-in	Solenoid/solenoid	External *3)	2450	-0,9 ... 16	2 ... 16	0,72	2 & 4	SXE0574-Z65-8#-***1)
	1	—	Solenoid/solenoid *2)	Internal	1230	2 ... 16	—	0,45	2 & 4	SXE1573-Z50-8#-***1)
	2	—	Solenoid/solenoid *2)	Internal	2450	2 ... 16	—	0,72	2 & 4	SXE1574-Z50-8#-***1)
	3	—	Solenoid/solenoid *2)	Internal	4400	2 ... 16	—	0,96	2 & 4	SXE1575-Z50-8#-***1)
	1	—	Solenoid/solenoid *2)	External *3)	1230	-0,9 ... 16	2 ... 16	0,45	2 & 4	SXE1573-Z55-8#-***1)
	2	—	Solenoid/solenoid *2)	External *3)	2450	-0,9 ... 16	2 ... 16	0,72	2 & 4	SXE1574-Z55-8#-***1)
	3	—	Solenoid/solenoid *2)	External *3)	4400	-0,9 ... 16	2 ... 16	0,96	2 & 4	SXE1575-Z55-8#-***1)

Insert code for manual override: 0 = push and turn, 1 = push only







***1) Insert voltage code from tables below for the coil version - i.e. 33N

Without coil please add a "K" after the manual override (#), the item number ends here - i.e.- SXE1575-Z50-8#K (CNOMO solenoid)

*2) Pilot side 14 priority

*3) External pilot supply for ISO1 at port 14 only; ISO2 and ISO3 at port 12 or 14 (unconnected port 12 or 14 has to be plugged).

5/3 Solenoid pilot actuated valves – 16 bar solenoid Solenoid pilot pressure

Symbol	ISO size	Flow regulator	Actuation	Function	Pilot supply	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model CNOMO solenoid actuated valves
	1	–	Solenoid/solenoid	APB	Internal	1320	2 ... 16	–	0,45	2 & 4	SXE9673-Z50-8#-***1)
	2	–	Solenoid/solenoid	APB	Internal	2520	2 ... 16	–	0,72	2 & 4	SXE9674-Z50-8#-***1)
	3	–	Solenoid/solenoid	APB	Internal	4650	2 ... 16	–	0,96	2 & 4	SXE9675-Z50-8#-***1)
	1	Built-in	Solenoid/solenoid	APB	Internal	1320	2 ... 16	–	0,45	2 & 4	SXE9673-Z60-8#-***1)
	2	Built-in	Solenoid/solenoid	APB	Internal	2520	2 ... 16	–	0,72	2 & 4	SXE9674-Z60-8#-***1)
	3	Built-in	Solenoid/solenoid	APB	Internal	4650	2 ... 16	–	0,96	2 & 4	SXE9675-Z60-8#-***1)
	1	–	Solenoid/solenoid	APB	External *3)	1320	-0,9 ... 16	2 ... 16	0,45	2 & 4	SXE9673-Z55-8#-***1)
	2	–	Solenoid/solenoid	APB	External *3)	2520	-0,9 ... 16	2 ... 16	0,72	2 & 4	SXE9674-Z55-8#-***1)
	3	–	Solenoid/solenoid	APB	External *3)	4650	-0,9 ... 16	2 ... 16	0,96	2 & 4	SXE9675-Z55-8#-***1)
	1	Built-in	Solenoid/solenoid	APB	External *3)	1320	-0,9 ... 16	2 ... 16	0,45	2 & 4	SXE9673-Z65-8#-***1)
	2	Built-in	Solenoid/solenoid	APB	External *3)	2520	-0,9 ... 16	2 ... 16	0,72	2 & 4	SXE9674-Z65-8#-***1)
	3	Built-in	Solenoid/solenoid	APB	External *3)	4650	-0,9 ... 16	2 ... 16	0,96	2 & 4	SXE9675-Z65-8#-***1)
	1	–	Solenoid/solenoid	COE	Internal	1320	2 ... 16	–	0,45	2 & 4	SXE9773-Z50-8#-***1)
	2	–	Solenoid/solenoid	COE	Internal	2520	2 ... 16	–	0,72	2 & 4	SXE9774-Z50-8#-***1)
	3	–	Solenoid/solenoid	COE	Internal	4650	2 ... 16	–	0,96	2 & 4	SXE9775-Z50-8#-***1)
	1	Built-in	Solenoid/solenoid	COE	Internal	1320	2 ... 16	–	0,45	2 & 4	SXE9773-Z60-8#-***1)
	2	Built-in	Solenoid/solenoid	COE	Internal	2520	2 ... 10	–	0,72	2 & 4	SXE9774-Z60-8#-***1)
	3	Built-in	Solenoid/solenoid	COE	Internal	4650	2 ... 10	–	0,96	2 & 4	SXE9775-Z60-8#-***1)
	1	–	Solenoid/solenoid	COE	External *3)	1320	-0,9 ... 16	2 ... 16	0,45	2 & 4	SXE9773-Z55-8#-***1)
	2	–	Solenoid/solenoid	COE	External *3)	2520	-0,9 ... 16	2 ... 16	0,72	2 & 4	SXE9774-Z55-8#-***1)
	3	–	Solenoid/solenoid	COE	External *3)	4650	-0,9 ... 16	2 ... 16	0,96	2 & 4	SXE9775-Z55-8#-***1)
	1	Built-in	Solenoid/solenoid	COE	External *3)	1320	-0,9 ... 16	2 ... 16	0,45	2 & 4	SXE9773-Z65-8#-***1)
	2	Built-in	Solenoid/solenoid	COE	External *3)	2520	-0,9 ... 16	2 ... 16	0,72	2 & 4	SXE9774-Z65-8#-***1)
	3	Built-in	Solenoid/solenoid	COE	External *3)	4650	-0,9 ... 16	2 ... 16	0,96	2 & 4	SXE9775-Z65-8#-***1)
	1	–	Solenoid/solenoid	COP	Internal	1320	2 ... 16	–	0,45	2 & 4	SXE9873-Z50-8#-***1)
	2	–	Solenoid/solenoid	COP	Internal	2520	2 ... 16	–	0,72	2 & 4	SXE9874-Z50-8#-***1)
	3	–	Solenoid/solenoid	COP	Internal	4650	2 ... 16	–	0,96	2 & 4	SXE9875-Z50-8#-***1)
	1	Built-in	Solenoid/solenoid	COP	Internal	1320	2 ... 16	–	0,45	2 & 4	SXE9873-Z60-8#-***1)
	2	Built-in	Solenoid/solenoid	COP	Internal	2520	2 ... 16	–	0,72	2 & 4	SXE9874-Z60-8#-***1)
	3	Built-in	Solenoid/solenoid	COP	Internal	4650	2 ... 16	–	0,96	2 & 4	SXE9875-Z60-8#-***1)
	1	–	Solenoid/solenoid	COP	External *3)	1320	-0,9 ... 16	2 ... 16	0,45	2 & 4	SXE9873-Z55-8#-***1)
	2	–	Solenoid/solenoid	COP	External *3)	2520	-0,9 ... 16	2 ... 16	0,72	2 & 4	SXE9874-Z55-8#-***1)
	3	–	Solenoid/solenoid	COP	External *3)	4650	-0,9 ... 16	2 ... 16	0,96	2 & 4	SXE9875-Z55-8#-***1)
	1	Built-in	Solenoid/solenoid	COP	External *3)	1320	-0,9 ... 16	2 ... 16	0,45	2 & 4	SXE9873-Z65-8#-***1)
	2	Built-in	Solenoid/solenoid	COP	External *3)	2520	-0,9 ... 16	2 ... 16	0,72	2 & 4	SXE9874-Z65-8#-***1)
	3	Built-in	Solenoid/solenoid	COP	External *3)	4650	-0,9 ... 16	2 ... 16	0,96	2 & 4	SXE9875-Z65-8#-***1)

Insert code for manual override: 0 = push and turn, 1 = push only

***1) Insert voltage code from tables below for the coil version - i.e. 33N

Without coil please add a "K" after the manual override (#), the item number ends here - i.e. - SXE1575-Z50-8#K (CNOMO solenoid)

*3) External pilot supply for ISO1 at port 14 only; ISO2 and ISO3 at port 12 or 14 (unconnected port 12 or 14 has to be plugged).

Valve function: APB = All Ports Blocked; COE = Centre Open Exhaust; COP = Centre Open Pressure

16 bar valve coils

Voltage codes and spare coils for 16 bar models

30 mm coil for connector interface acc. acc. EN 175 301-803, form A				
	Voltage	Power Inrush/Hold	Model	Code
	12 V d.c.	4 W	V10633-A32N	32N
	24 V d.c.	4 W	V10633-A33N	33N
	110 V d.c.	4 W	V10633-A37N	37N
	24 V a.c.	10/8 VA	V10633-A84N	84N
	110/120 V 50/60 Hz	10/8 VA	V10633-A88N	88N
	220/240 V 50/60 Hz	10/8 VA	V10633-A89N	89N

Other Voltages available on request.

Connector plug - ordered separately

30 mm, EN 175301-803 (DIN 43650 B) Form A 2-pole + PE

0570275000000000

10 & 16 bar Solenoid actuated valves option selector

Option selector (solenoid actuated valves)

SXE★★★7★-★★★-★★-★★★

Valve function	Substitute
5/2 Solenoid/solenoid, bistable valve	05
5/2 Solenoid/solenoid, bistable valve with side 14 priority	15
5/2 solenoid/spring, monostable valve	95
5/3 - APB	96
5/3 - COE	97
5/3 - COP	98
ISO size	Substitute
ISO 1	3
ISO 2	4
ISO 3	5
Solenoid position	Substitute
End solenoid actuated valves	A
CNOMO solenoid actuated valves	Z
Integrated flow control	Substitute
Without flow regulator (double solenoid)	5
With flow regulator (double solenoid)	6
Without flow regulator (solenoid & spring)	7
With flow regulator (solenoid & spring)	8

Voltage code for valve with coil	Substitute
For voltage code see tables on page 4 and 6	
Valve without coil	Substitute
Remove dash (-)	K
Manual override	Substitute
Push and turn to lock (standard - End solenoid)	0
Push only	1
Operating pressure	Substitute
10 bar - end solenoid actuated valves	0
10 bar - CNOMO solenoid actuated valves	6
16 bar - CNOMO solenoid actuated valves	8
Pilot supply	Substitute
Internal (double solenoid or single solenoid/air spring)	0
Internal (single solenoid valve, mechanical spring)	1
External (double solenoid or single solenoid/air spring)	5
External (single solenoid valve, mechanical spring)	6






Note; Valves without coil - order coil separately according to voltage tables applicable for the Solenoid pilot pressure 10 or 16 bar

Accessories for ISO G parallel and NPT threads - non ATEX

Sandwich plate with check valves	
	
ISO size	Page 26
1	FP7050
2	—
3	FP7070

Additional models Solenoid actuated valves - Classic range 10 bar valve bodies

5/2 Solenoid pilot actuated valves – 10 bar models













Symbol	ISO size	Flow regulator	Actuation	Pilot supply	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model End solenoid actuated valves
	1	—	Solenoid/air spring	Internal	1230	1 ... 10	—	0,33	1	SXE9573-170-0#K
	2	—	Solenoid/air spring	Internal	2450	1 ... 10	—	0,59	1	SXE9574-170-0#K
	3	—	Solenoid/air spring	Internal	4400	1 ... 10	—	0,85	1	SXE9575-170-0#K
	1	Built-in	Solenoid/air spring	Internal	1230	1 ... 10	—	0,33	1	SXE9573-180-0#K
	2	Built-in	Solenoid/air spring	Internal	2450	1 ... 10	—	0,59	1	SXE9574-180-0#K
	1	—	Solenoid/air spring	External *3)	1230	-0,9 ... 16	1 ... 10	0,33	1	SXE9573-175-0#K
	1	Built-in	Solenoid/air spring	External *3)	1230	-0,9 ... 16	1 ... 10	0,33	1	SXE9573-185-0#K
	2	—	Solenoid/air spring	External *3)	2450	-0,9 ... 16	1 ... 10	0,59	1	SXE9574-175-0#K
	3	—	Solenoid/air spring	External *3)	4400	-0,9 ... 16	1 ... 10	0,85	1	SXE9575-175-0#K
	2	Built-in	Solenoid/air spring	External *3)	2450	-0,9 ... 16	1 ... 10	0,59	1	SXE9574-185-0#K
	1	—	Solenoid/spring	Internal	1230	1,8 ... 10	—	0,33	1	SXE9573-171-0#K
	2	—	Solenoid/spring	Internal	2450	1,8 ... 10	—	0,59	1	SXE9574-171-0#K
	3	—	Solenoid/spring	Internal	4400	1,8 ... 10	—	0,85	1	SXE9575-171-0#K
	1	Built-in	Solenoid/spring	Internal	1230	1,8 ... 10	—	0,33	1	SXE9573-181-0#K
	2	Built-in	Solenoid/spring	Internal	2450	1,8 ... 10	—	0,59	1	SXE9574-181-0#K
	1	—	Solenoid/spring	External *3)	1230	-0,9 ... 16	1,8 ... 10	0,33	1	SXE9573-176-0#K
	2	—	Solenoid/spring	External *3)	2450	-0,9 ... 16	1,8 ... 10	0,59	1	SXE9574-176-0#K
	3	—	Solenoid/spring	External *3)	4400	-0,9 ... 16	1,8 ... 10	0,85	1	SXE9575-176-0#K
	1	Built-in	Solenoid/spring	External *3)	1230	-0,9 ... 16	1,8 ... 10	0,33	1	SXE9573-186-0#K
	2	Built-in	Solenoid/spring	External *3)	2450	-0,9 ... 16	1,8 ... 10	0,59	1	SXE9574-186-0#K
	1	—	Solenoid/solenoid	Internal	1230	2 ... 10	—	0,45	2	SXE0573-150-0#K
	2	—	Solenoid/solenoid	Internal	2450	2 ... 10	—	0,72	2	SXE0574-150-0#K
	3	—	Solenoid/solenoid	Internal	4400	2 ... 10	—	0,96	2	SXE0575-150-0#K
	1	Built-in	Solenoid/solenoid	Internal	1230	2 ... 10	—	0,45	2	SXE0573-160-0#K
	2	Built-in	Solenoid/solenoid	Internal	2450	2 ... 10	—	0,72	2	SXE0574-160-0#K
	1	—	Solenoid/solenoid	External *3)	1230	-0,9 ... 16	2 ... 10	0,45	2	SXE0573-155-0#K
	2	—	Solenoid/solenoid	External *3)	2450	-0,9 ... 16	2 ... 10	0,72	2	SXE0574-155-0#K
	3	—	Solenoid/solenoid	External *3)	4400	-0,9 ... 16	2 ... 10	0,96	2	SXE0575-155-0#K
	1	Built-in	Solenoid/solenoid	External *3)	1230	-0,9 ... 16	2 ... 10	0,45	2	SXE0573-165-0#K
	2	Built-in	Solenoid/solenoid	External *3)	2450	-0,9 ... 16	2 ... 10	0,72	2	SXE0574-165-0#K

Insert code for manual override: 0 = push and turn to lock; 1 = push only

*3) External pilot supply for ISO1 at port 14 only; ISO2 and ISO3 at port 12 or 14 (unconnected port 12 or 14 has to be plugged).

Note: Do not mix components from this section with those from the previous non-ATEX section.

5/3 Solenoid pilot actuated valves – 10 bar models

Symbol	ISO size	Flow regulator	Actuation	Function	Pilot supply	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model End solenoid actuated valves
	1	–	Solenoid/solenoid	APB	Internal	1320	2 ... 10	–	0,45	2	SXE9673-150-0#K
	2	–	Solenoid/solenoid	APB	Internal	2520	2 ... 10	–	0,72	2	SXE9674-150-0#K
	3	–	Solenoid/solenoid	APB	Internal	4650	2 ... 10	–	0,96	2	SXE9675-150-0#K
	1	Built-in	Solenoid/solenoid	APB	Internal	1320	2 ... 10	–	0,45	2	SXE9673-160-0#K
	2	Built-in	Solenoid/solenoid	APB	Internal	2520	2 ... 10	–	0,72	2	SXE9674-160-0#K
	1	–	Solenoid/solenoid	APB	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9673-155-0#K
	2	–	Solenoid/solenoid	APB	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9674-155-0#K
	3	–	Solenoid/solenoid	APB	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2	SXE9675-155-0#K
	1	Built-in	Solenoid/solenoid	APB	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9673-165-0#K
	2	Built-in	Solenoid/solenoid	APB	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9674-165-0#K
	1	–	Solenoid/solenoid	COE	Internal	1320	2 ... 10	–	0,45	2	SXE9773-150-0#K
	2	–	Solenoid/solenoid	COE	Internal	2520	2 ... 10	–	0,72	2	SXE9774-150-0#K
	3	–	Solenoid/solenoid	COE	Internal	4650	2 ... 10	–	0,96	2	SXE9775-150-0#K
	1	Built-in	Solenoid/solenoid	COE	Internal	1320	2 ... 10	–	0,45	2	SXE9773-160-0#K
	2	Built-in	Solenoid/solenoid	COE	Internal	2520	2 ... 10	–	0,72	2	SXE9774-160-0#K
	1	–	Solenoid/solenoid	COE	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9773-155-0#K
	2	–	Solenoid/solenoid	COE	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9774-155-0#K
	3	–	Solenoid/solenoid	COE	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2	SXE9775-155-0#K
	1	Built-in	Solenoid/solenoid	COE	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9673-165-0#K
	2	Built-in	Solenoid/solenoid	COE	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9674-165-0#K
	1	–	Solenoid/solenoid	COP	Internal	1320	2 ... 10	–	0,45	2	SXE9873-150-0#K
	2	–	Solenoid/solenoid	COP	Internal	2520	2 ... 10	–	0,72	2	SXE9874-150-0#K
	3	–	Solenoid/solenoid	COP	Internal	4650	2 ... 10	–	0,96	2	SXE9875-150-0#K
	1	Built-in	Solenoid/solenoid	COP	Internal	1320	2 ... 10	–	0,45	2	SXE9873-160-0#K
	2	Built-in	Solenoid/solenoid	COP	Internal	2520	2 ... 10	–	0,72	2	SXE9874-160-0#K
	1	–	Solenoid/solenoid	COP	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9873-155-0#K
	2	–	Solenoid/solenoid	COP	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9874-155-0#K
	3	–	Solenoid/solenoid	COP	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2	SXE9875-155-0#K
	1	Built-in	Solenoid/solenoid	COP	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9873-165-0#K
	2	Built-in	Solenoid/solenoid	COP	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9874-165-0#K

Insert code for manual override: 0 = push and turn to lock; 1 = push only




*3) External pilot supply for ISO1 at port 14 only; ISO2 and ISO3 at port 12 or 14 (unconnected port 12 or 14 has to be plugged).

Note: Do not mix components from this section with those from the previous non-ATEX section.

Valve function: APB = All Ports Blocked; COE = Centre Open Exhaust; COP = Centre Open Pressure



Air pilot actuated valves 16 bar Valve bodies

5/2 Air pilot actuated valves – 16 bar models

Symbol	ISO size	Flow regulator	Actuation	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model
	1	–	Air/spring	1230	-0,9 ... 16	1,8 ... 16	0,21	5	SXP9573-170-00
	2	–	Air/spring	2450	-0,9 ... 16	1,8 ... 16	0,45	5	SXP9574-170-00
	3	–	Air/spring	4400	-0,9 ... 16	1,8 ... 16	0,72	5	SXP9575-170-00
	1	Built-in	Air/spring	1230	-0,9 ... 16	1,8 ... 16	0,21	5	SXP9573-180-00
	2	Built-in	Air/spring	2450	-0,9 ... 16	1,8 ... 16	0,45	5	SXP9574-180-00
	3	–	Air/spring	4400	-0,9 ... 16	1,8 ... 16	0,72	5	SXP9575-180-00
	1	–	Air/air	1230	-0,9 ... 16	2 ... 16	0,30	6	SXP0573-170-00
	2	–	Air/air	2450	-0,9 ... 16	2 ... 16	0,50	6	SXP0574-170-00
	3	–	Air/air	4400	-0,9 ... 16	2 ... 16	0,72	6	SXP0575-170-00
	1	Built-in	Air/air	1230	-0,9 ... 16	2 ... 16	0,30	6	SXP0573-180-00
	2	Built-in	Air/air	2450	-0,9 ... 16	2 ... 16	0,50	6	SXP0574-180-00
	3	–	Air/air	4400	-0,9 ... 16	2 ... 16	0,72	6	SXP0575-180-00
	1	–	Air/air *2)	1230	-0,9 ... 16	2 ... 16	0,30	6	SXP1573-170-00
	2	–	Air/air *2)	2450	-0,9 ... 16	2 ... 16	0,50	6	SXP1574-170-00
	3	–	Air/air *2)	4400	-0,9 ... 16	2 ... 16	0,72	6	SXP1575-170-00

*2) Pilot side 14 priority

5/3 Air pilot actuated valves – 16 bar models

Symbol	ISO size	Flow regulator	Actuation	Function	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model
	1	–	Air/air	APB	1230	-0,9 ... 16	1,8 ... 16	0,25	6	SXP9673-170-00
	2	–	Air/air	APB	2450	-0,9 ... 16	1,8 ... 16	0,58	6	SXP9674-170-00
	3	–	Air/air	APB	4400	-0,9 ... 16	1,8 ... 16	0,8	6	SXP9675-170-00
	1	Built-in	Air/air	APB	1230	-0,9 ... 16	1,8 ... 16	0,25	6	SXP9673-180-00
	2	Built-in	Air/air	APB	2450	-0,9 ... 16	1,8 ... 16	0,58	6	SXP9674-180-00
	3	–	Air/air	APB	4400	-0,9 ... 16	1,8 ... 16	0,8	6	SXP9675-180-00
	1	–	Air/air	COE	1230	-0,9 ... 16	2 ... 16	0,25	6	SXP9773-170-00
	2	–	Air/air	COE	2450	-0,9 ... 16	2 ... 16	0,58	6	SXP9774-170-00
	3	–	Air/air	COE	4400	-0,9 ... 16	2 ... 16	0,80	6	SXP9775-170-00
	1	Built-in	Air/air	COE	1230	-0,9 ... 16	2 ... 16	0,25	6	SXP9773-180-00
	2	Built-in	Air/air	COE	2450	-0,9 ... 16	2 ... 16	0,58	6	SXP9774-180-00
	3	–	Air/air	COE	4400	-0,9 ... 16	2 ... 16	0,80	6	SXP9775-180-00
	1	–	Air/air	COP	1230	-0,9 ... 16	2 ... 16	0,25	6	SXP9873-170-00
	2	–	Air/air	COP	2450	-0,9 ... 16	2 ... 16	0,58	6	SXP9874-170-00
	3	–	Air/air	COP	4400	-0,9 ... 16	2 ... 16	0,80	6	SXP9875-170-00
	1	Built-in	Air/air	COP	1230	-0,9 ... 16	2 ... 16	0,25	6	SXP9873-180-00
	2	Built-in	Air/air	COP	2450	-0,9 ... 16	2 ... 16	0,58	6	SXP9874-180-00
	3	–	Air/air	COP	4400	-0,9 ... 16	2 ... 16	0,80	6	SXP9875-180-00

Valve function: APB = All Ports Blocked; COE = Centre Open Exhaust; COP = Centre Open Pressure

Option selector (Air pilotactuated valves)

Valve function	Substitute		Integrated flow control	Substitute
5/2 pilot/pilot, bistable valve	05	SXP★7★1★0-00	Without	7
5/2 pilot/pilot, bistable valve with side 14 priority	15		With	8
5/2 pilot/spring, monostable valve	95			
5/3 - APB	96			
5/3 - COE	97			
5/3 - COP	98			
ISO size	Substitute			
ISO 1	3			
ISO 2	4			
ISO 3	5			

Valves for atex environments

Important Information






This section of the datasheet covers ISO*STAR valve assemblies intended for use in ATEX environments. To ensure compliance and safety, use only the valve bodies and coils listed here and follow all technical recommendations carefully.

Important Note

- Valve assemblies shown in this section (coils + bodies) do not carry full ATEX certification, but can be used in ATEX zones if the customer performs a proper risk assessment according to EN ISO 80079-36 standard.
- Only coils marked as "ATEX certified" are officially approved for use in explosive environments
- Do not mix components from this section with those from the previous non-ATEX section.
- For detailed guidance on ATEX zone compliance, please contact IMI Technical Support.
- Please contact IMI technical support if you require an ATEX declaration of conformity referring to any particular valve combination (coil + body) found in this section

Valve bodies (non-ATEX certified)

5/2 Solenoid pilot actuated valves – 10 bar models






Symbol	ISO size	Flow regulator	Actuation	Pilot supply	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model End solenoid actuated valves
	1	—	Solenoid/air spring	Internal	1230	1 ... 10	—	0,33	1	SXE9573-170-0#K
	2	—	Solenoid/air spring	Internal	2450	1 ... 10	—	0,59	1	SXE9574-170-0#K
	3	—	Solenoid/air spring	Internal	4400	1 ... 10	—	0,85	1	SXE9575-170-0#K
	1	Built-in	Solenoid/air spring	Internal	1230	1 ... 10	—	0,33	1	SXE9573-180-0#K
	2	Built-in	Solenoid/air spring	Internal	2450	1 ... 10	—	0,59	1	SXE9574-180-0#K
	3	—	Solenoid/air spring	Internal	4400	1 ... 10	—	0,85	1	SXE9575-180-0#K
	1	—	Solenoid/air spring	External *3)	1230	-0,9 ... 16	1 ... 10	0,33	1	SXE9573-175-0#K
	1	Built-in	Solenoid/air spring	External *3)	1230	-0,9 ... 16	1 ... 10	0,33	1	SXE9573-185-0#K
	2	—	Solenoid/air spring	External *3)	2450	-0,9 ... 16	1 ... 10	0,59	1	SXE9574-175-0#K
	2	Built-in	Solenoid/air spring	External *3)	2450	-0,9 ... 16	1 ... 10	0,59	1	SXE9574-185-0#K
	3	—	Solenoid/air spring	External *3)	4400	-0,9 ... 16	1 ... 10	0,85	1	SXE9575-175-0#K
	3	Built-in	Solenoid/air spring	External *3)	4400	-0,9 ... 16	1 ... 10	0,85	1	SXE9575-185-0#K
	1	—	Solenoid/spring	Internal	1230	1,8 ... 10	—	0,33	1	SXE9573-171-0#K
	2	—	Solenoid/spring	Internal	2450	1,8 ... 10	—	0,59	1	SXE9574-171-0#K
	3	—	Solenoid/spring	Internal	4400	1,8 ... 10	—	0,85	1	SXE9575-171-0#K
	1	Built-in	Solenoid/spring	Internal	1230	1,8 ... 10	—	0,33	1	SXE9573-181-0#K
	2	Built-in	Solenoid/spring	Internal	2450	1,8 ... 10	—	0,59	1	SXE9574-181-0#K
	3	—	Solenoid/spring	Internal	4400	1,8 ... 10	—	0,85	1	SXE9575-181-0#K
	1	—	Solenoid/spring	External *3)	1230	-0,9 ... 16	1,8 ... 10	0,33	1	SXE9573-176-0#K
	2	—	Solenoid/spring	External *3)	2450	-0,9 ... 16	1,8 ... 10	0,59	1	SXE9574-176-0#K
	3	—	Solenoid/spring	External *3)	4400	-0,9 ... 16	1,8 ... 10	0,85	1	SXE9575-176-0#K
	1	Built-in	Solenoid/spring	External *3)	1230	-0,9 ... 16	1,8 ... 10	0,33	1	SXE9573-186-0#K
	2	Built-in	Solenoid/spring	External *3)	2450	-0,9 ... 16	1,8 ... 10	0,59	1	SXE9574-186-0#K
	3	—	Solenoid/spring	External *3)	4400	-0,9 ... 16	1,8 ... 10	0,85	1	SXE9575-186-0#K
	1	—	Solenoid/solenoid	Internal	1230	2 ... 10	—	0,45	2	SXE0573-150-0#K
	2	—	Solenoid/solenoid	Internal	2450	2 ... 10	—	0,72	2	SXE0574-150-0#K
	3	—	Solenoid/solenoid	Internal	4400	2 ... 10	—	0,96	2	SXE0575-150-0#K
	1	Built-in	Solenoid/solenoid	Internal	1230	2 ... 10	—	0,45	2	SXE0573-160-0#K
	2	Built-in	Solenoid/solenoid	Internal	2450	2 ... 10	—	0,72	2	SXE0574-160-0#K
	3	—	Solenoid/solenoid	Internal	4400	2 ... 10	—	0,96	2	SXE0575-160-0#K
	1	—	Solenoid/solenoid	External *3)	1230	-0,9 ... 16	2 ... 10	0,45	2	SXE0573-155-0#K
	2	—	Solenoid/solenoid	External *3)	2450	-0,9 ... 16	2 ... 10	0,72	2	SXE0574-155-0#K
	3	—	Solenoid/solenoid	External *3)	4400	-0,9 ... 16	2 ... 10	0,96	2	SXE0575-155-0#K
	1	Built-in	Solenoid/solenoid	External *3)	1230	-0,9 ... 16	2 ... 10	0,45	2	SXE0573-165-0#K
	2	Built-in	Solenoid/solenoid	External *3)	2450	-0,9 ... 16	2 ... 10	0,72	2	SXE0574-165-0#K
	3	—	Solenoid/solenoid	External *3)	4400	-0,9 ... 16	2 ... 10	0,96	2	SXE0575-165-0#K

Insert code for manual override: 0 = push and turn to lock; 1 = push only

*3) External pilot supply for ISO1 at port 14 only; ISO2 and ISO3 at port 12 or 14 (unconnected port 12 or 14 has to be plugged).

Note: Solenoids ordered separately - models see page 15

5/3 Solenoid pilot actuated valves – 10 bar models

Symbol	ISO size	Flow regulator	Actuation	Function	Pilot supply	Flow (l/min)	Operating pressure (bar)	Pilot pressure (bar)	Weight (kg)	Drawing No.	Model End solenoid actuated valves
	1	–	Solenoid/solenoid	APB	Internal	1320	2 ... 10	–	0,45	2	SXE9673-150-0#K
	2	–	Solenoid/solenoid	APB	Internal	2520	2 ... 10	–	0,72	2	SXE9674-150-0#K
	3	–	Solenoid/solenoid	APB	Internal	4650	2 ... 10	–	0,96	2	SXE9675-150-0#K
	1	Built-in	Solenoid/solenoid	APB	Internal	1320	2 ... 10	–	0,45	2	SXE9673-160-0#K
	2	Built-in	Solenoid/solenoid	APB	Internal	2520	2 ... 10	–	0,72	2	SXE9674-160-0#K
	1	–	Solenoid/solenoid	APB	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9673-155-0#K
	2	–	Solenoid/solenoid	APB	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9674-155-0#K
	3	–	Solenoid/solenoid	APB	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2	SXE9675-155-0#K
	1	Built-in	Solenoid/solenoid	APB	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9673-165-0#K
	2	Built-in	Solenoid/solenoid	APB	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9674-165-0#K
	1	–	Solenoid/solenoid	COE	Internal	1320	2 ... 10	–	0,45	2	SXE9773-150-0#K
	2	–	Solenoid/solenoid	COE	Internal	2520	2 ... 10	–	0,72	2	SXE9774-150-0#K
	3	–	Solenoid/solenoid	COE	Internal	4650	2 ... 10	–	0,96	2	SXE9775-150-0#K
	1	Built-in	Solenoid/solenoid	COE	Internal	1320	2 ... 10	–	0,45	2	SXE9773-160-0#K
	2	Built-in	Solenoid/solenoid	COE	Internal	2520	2 ... 10	–	0,72	2	SXE9774-160-0#K
	1	–	Solenoid/solenoid	COE	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9773-155-0#K
	2	–	Solenoid/solenoid	COE	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9774-155-0#K
	3	–	Solenoid/solenoid	COE	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2	SXE9775-155-0#K
	1	Built-in	Solenoid/solenoid	COE	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9673-165-0#K
	2	Built-in	Solenoid/solenoid	COE	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9674-165-0#K
	1	–	Solenoid/solenoid	COP	Internal	1320	2 ... 10	–	0,45	2	SXE9873-150-0#K
	2	–	Solenoid/solenoid	COP	Internal	2520	2 ... 10	–	0,72	2	SXE9874-150-0#K
	3	–	Solenoid/solenoid	COP	Internal	4650	2 ... 10	–	0,96	2	SXE9875-150-0#K
	1	Built-in	Solenoid/solenoid	COP	Internal	1320	2 ... 10	–	0,45	2	SXE9873-160-0#K
	2	Built-in	Solenoid/solenoid	COP	Internal	2520	2 ... 10	–	0,72	2	SXE9874-160-0#K
	1	–	Solenoid/solenoid	COP	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9873-155-0#K
	2	–	Solenoid/solenoid	COP	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9874-155-0#K
	3	–	Solenoid/solenoid	COP	External *3)	4650	-0,9 ... 16	2 ... 10	0,96	2	SXE9875-155-0#K
	1	Built-in	Solenoid/solenoid	COP	External *3)	1320	-0,9 ... 16	2 ... 10	0,45	2	SXE9873-165-0#K
	2	Built-in	Solenoid/solenoid	COP	External *3)	2520	-0,9 ... 16	2 ... 10	0,72	2	SXE9874-165-0#K

Insert code for manual override: 0 = push and turn to lock; 1 = push only

*3) External pilot supply for ISO1 at port 14 only; ISO2 and ISO3 at port 12 or 14 (unconnected port 12 or 14 has to be plugged).

Note: Solenoids ordered separately - models see page 15

Valve function: APB = All Ports Blocked; COE = Centre Open Exhaust; COP = Centre Open Pressure

ATEX certified coils

Solenoid actuators - ordered separately


	Voltage	Power con- sumption (mA)	Rated current	Ex- Pro tection	IP-Protection class (to EN 60529)	Tempera- ture Ambient/ Fluid (°C)	Electrical connection	Weight (kg)	Dimension No	Circuit diagram No	Model	
					Ex-Protection (ATEX-Category)						Current	Old
	24 V d.c.*)	207	5,0 W	II2G	Ex mb IIC T4 Gb Ex mb tb T130°C Db	-15 ... +50	Cable H05V2V2-F 3G1 Length: 3 m	0,3	13	14	306002400	TM3902-AT
	230 V a.c. *)	22	5,1 VA	II2D						15	306123050	TM3948-AT
	24 V d.c.*)	115	2,8 W	II2G	Ex mb IIC T5 Gb Ex mb tb T95°C Db					14	306202400	TM2002-AT
	230 V a.c. *)	9	2,1 VA	II2D						15	306323050	TM2048-AT
	24 V d.c.	84	2,0 W	II3G II3D	Ex ec IIC T5 Gc TBC Ex tc IIIC T95° Dc IP65 (with connector)	-15 ... +50	With special connector DIN EN 175301-803 Form A	0,3	12	1	304602400	TM1702-AT
	110 V 50Hz	36	4,0 W								304711050	TM1746-AT
	110 V 60Hz	28	3,1 W								304711050	TM1746-AT
	120 V 60Hz	33	4,0 W								304711050	TM1746-AT
	230 V 50Hz	18	4,0 W								304723050	TM1748-AT
	230 V 60Hz	14	3,1 W								304723050	TM1748-AT
	240 V 60Hz	15	3,5 W								304723050	TM1748-AT

*) With AC voltage a system frequency of 50...60 Hz is permitted with DC voltage a max ripple of 20% is permitted
Standard voltage tolerance +/-10%.
Manifold installation: max. ambient temperature 40 °C (independent of coil configuration)
Standalone installation: max. ambient temperature 50 °C (independent of coil configuration)
Detail information in Operating instructions for solenoids Type 3046, 3047: 750347400000050.03.13
Detail information in Operating instructions for solenoids Type 306x: 750347300000050.01.13
Further version on request.

Approvals

Model	Approvals ATEX	IECEX	FM
306x	PTB 03 ATEX 2015 X	—	—
304x	self assessment		

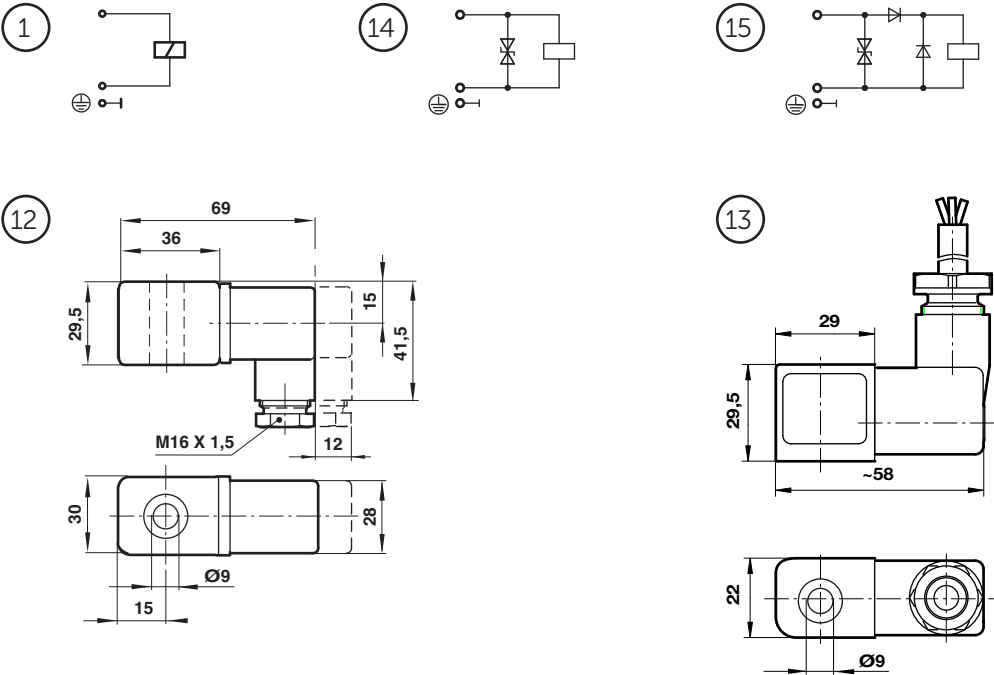Circuit diagramm



12

13

Dimensions in mm
Projection/First angle

10 bar Solenoid actuated valves option selector

Option selector (solenoid actuated valves)

SXE★★7★-1★★-0★K

Valve function	Substitute
5/2 solenoid/solenoid, bistable valve	05
5/2 solenoid/spring, monostable valve	95
5/3 - APB	96
5/3 - COE	97
5/3 - COP	98
ISO size	Substitute
ISO 1	3
ISO 2	4
ISO 3	5

Manual override	Substitute
Push and turn to lock (standard)	0
Push only	1
Pilot supply	Substitute
Internal (double solenoid or single solenoid/air spring)	0
Internal (single solenoid valve, mechanical spring)	1
External (double solenoid or single solenoid/air spring)	5
External (single solenoid valve, mechanical spring)	6
Integrated flow control	Substitute
Without flow regulator (double solenoid)	5
With flow regulator (double solenoid)	6
Without flow regulator (solenoid & spring)	7
With flow regulator (solenoid & spring)	8

ATEX permissible accessories

Following accessories of the ISO*STAR series are applicable in Ex zones 1, 2, 21 and 22:

Sub-bases, end plates and blanking disc - VDMA 24345 sub-base options

	Single station sub-base, Form A side ported		Single station sub-base Form B bottom ported	Modular sub-base Form C	Form D End plates	Blanking disc for VDMA sub-bases *1)
						
ISO size	Page 21 ISO G thread	NPT thread	Page 21 ISO G thread	Page 21 ISO G thread	Page 21 ISO G thread	Page 22 ISO G thread
1	M/P19126 (1/4)	C/P19126 (1/4)	M/P19125 (1/4)	CQM/22152/3/21	CQM/22152/3/22	FP 8382
2	M/P19132 (3/8)	C/P19132 (3/8)	M/P19131 (3/8)	CQM/22253/3/21	CQM/22253/3/22	FP 8482
3	M/P19138 (1/2)	C/P19138 (1/2)	M/P19137 (1/2)	CQM/22354/3/21	CQM/22354/3/22	FP 8582

Universal sub-base options for ISO G parallel threads only

	Modular base with side, end and bottom ports open	Universal end plate, all ports blocked	Universal end plate, side ports open	Transition plate from ISO 1 » ISO 2	Blanking disk for ISO 1 and ISO 2
ISO size	Page 23	Page 23	Page 23	Page 23	Page 23
1	CQM/22152/3/27 (G1/4)	CQM/22152/3/28 (G1/4)	CQM/22152/3/31 (G1/4)	CQM/22152/3/29	M/P43173
2	CQM/22253/3/27 (G3/8)	CQM/22253/3/28 (G3/8)	CQM/22253/3/31 (G3/8)	CQM/22152/3/29	M/P43174

Accessories for ISO G parallel and NPT threads

	Blanking plate for VDMA and universal sub-bases	Transition plate for VDMA sub-bases	Flow regulator plate, ports 3 and 5 regulated
ISO size	Page 22	Page 22	Page 20
1	CQM/22152/3/23	CQM/22152/3/24 (1 » 2)	—
2	CQM/22253/3/23	CQM/22253/3/24 (2 » 3)	—
3	CQM/22354/3/23	-	CQM/22354/3/26


Sandwich plates - ISO size 1

	Single pressure regulator plate, port 1 regulated	Single pressure regulator plate, port 1 regulated	Single pressure regulator plate, port 2 regulated	Single pressure regulator plate, port 4 regulated	Double pressure regulator plate, port 2 & 4 regulated
ISO size	Page 24	Page 24	Page 24	Page 24	Page 25
1	V71010-KB1 (Regulator on side 14)	V71011-KB1 (Regulator on side 12)	V71012-KB2	V71012-KB3	V71012-KB4

Non ATEX drawings

SXE957*-A models Single end Solenoid pilot valves

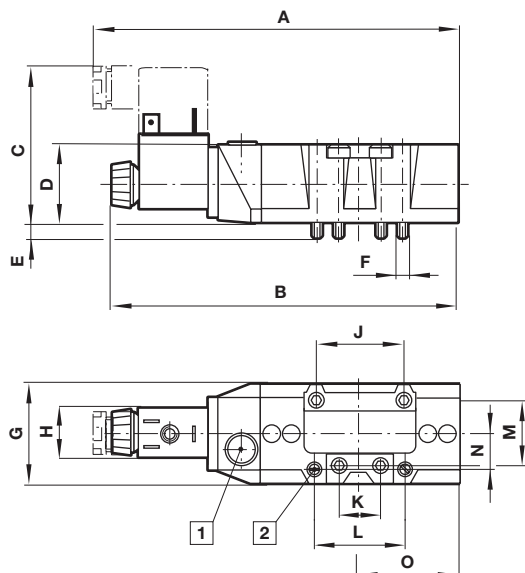①




ISO size	A	B	C	D	E	F	G	H	J
1	154	146	66	33	7,5	M5	42	22/30	36
2	181	173	71	42	8	M6	55	22/30	48
3	207,5	197	72	43	11,5	M8	62,5	22/30	64
ISO size	K	L	M	N	O	kg	Model		
1	18	38	28	15	42	0,33	SXE9573-A...		
2	24	48	38	20	53	0,59	SXE9574-A...		
3	32	-	48	-	65,5	0,85	SXE9575-A...		

Dimensions in mm
Projection/First angle



SXE057*-A and SXE9*7*-A models Double end Solenoid pilot valves

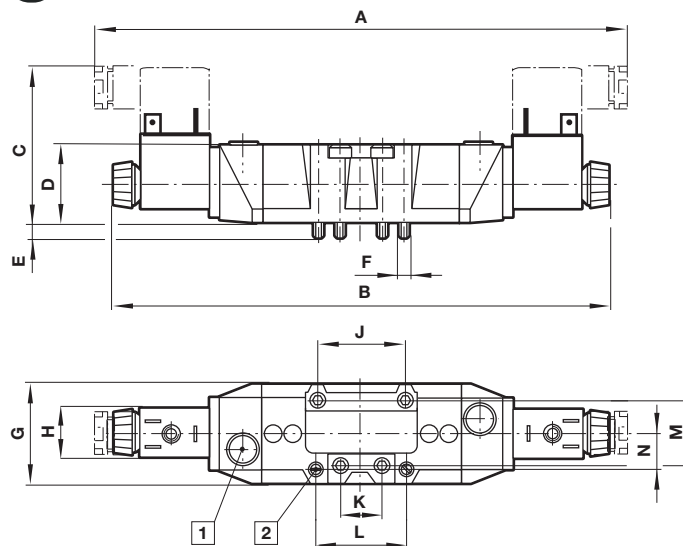
②



① Manual override
② Flow regulators


ISO size	A	B	C	D	E	F	G	H	J
1	222	204	65	33	7,5	M5	42	22/30	36
2	255	239	71	42	8	M6	55	22/30	48
3	284	263	72	43	11,5	M8	62,5	22/30	64
ISO size	K	L	M	N	kg	Model			
1	18	38	28	15	0,45	SXE0573-A..., SXE9.73-A...			
2	24	48	38	20	0,72	SXE0574-A..., SXE9.74-A...			
3	32	-	48	-	0,96	SXE0575-A..., SXE9.75-A...			

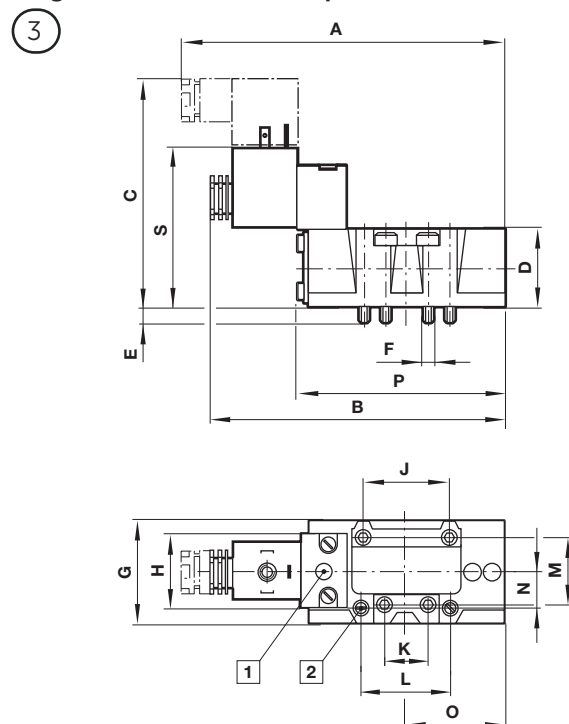SXE957*-Z models Single CNOMO Solenoid pilot valves



ISO size	A	B	C	D	E	F	G	H	J	K
1	137,5	128	98	33	7,5	M5	42	32	36	18
2	157,5	148	107	42	8	M6	55	32	48	24
3	181	170	108	43	11,5	M8	62,5	32	64	32
ISO size	L	M	N	O	P	S	kg	Model		
1	38	28	15	42	88	62	0,6	SXE9573-Z...		
2	48	38	20	53	112	71	0,8	SXE9574-Z...		
3	-	48	-	65,5	135,5	78,5	1,0	SXE9575-Z...		

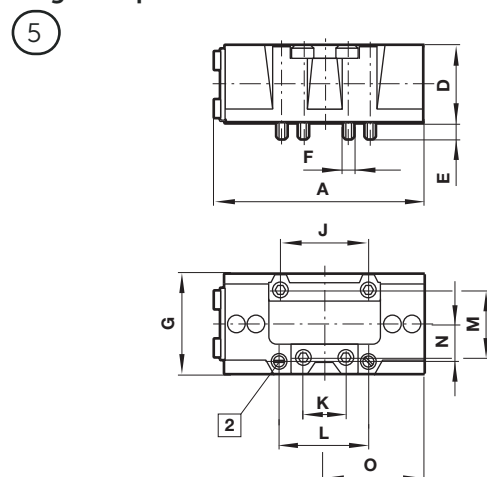
SXP957* models Single Air pilotvalve



ISO size	A	D	E	F	G	J	K
1	88	33	7,5	M5	42	36	18
2	112	42	8	M6	55	48	24
3	135,5	43	11,5	M8	62,5	64	32
ISO size	L	M	N	O	kg	Model	
1	38	28	15	42	0,3	SXP9573-..., SXP*573-...	
2	48	38	20	53	0,5	SXP9574-..., SXP*574-...	
3	-	48	-	65,5	0,7	SXP9575-..., SXP*574-...	

SXE057*-Z and SXE9*7*-Z models Double CNOMO Solenoid pilot valves

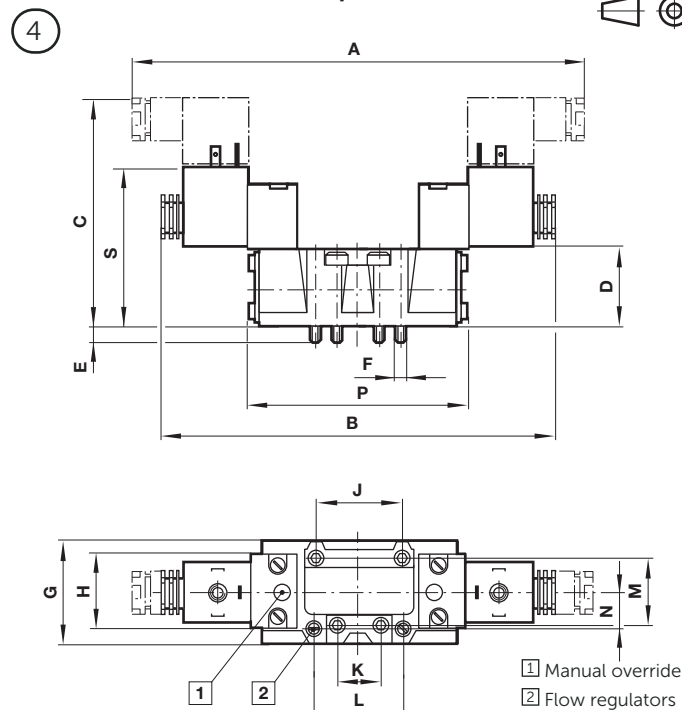
Dimensions in mm
Projection/First angle



ISO size	A	B	C	D	E	F	G	H	J	K
1	191	171	89	33	7,5	M5	42	32	36	18
2	208	189	107	42	8	M6	55	32	48	24
3	231	212	108	43	11,5	M8	62,5	32	64	32
ISO size	L	M	N	P	S	kg	Model			
1	38	28	15	92,5	62	1,0	SXE0573-Z..., SXE9.73-Z...			
2	48	38	20	119	71	1,2	SXE0574-Z..., SXE9.74-Z...			
3	-	48	-	140 (142)	78,5	1,4	SXE0575-Z..., SXE9.75-Z...			

() for 5/3 way valves

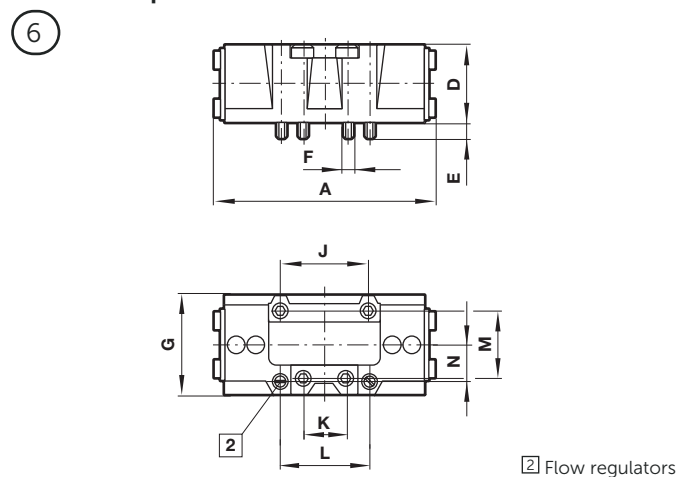SXP*57*, SXP967*, SXP977* & SXP987* models Double Air pilotvalve




ISO size	A	D	E	F	G	J	K
1	92,5	33	7,5	M5	42	36	18
2	119	42	8	M6	55	48	24
3	140 (142)	43	11,5	M8	62,5	64	32
ISO size	L	M	N	kg	Model		
1	38	28	15	0,3	SXP0573-..., SXP9*73-...		
2	48	38	20	0,5	SXP*574-..., SXP9*74-...		
3	–	48	–	0,7	SXP*575-..., SXP9*75-...		

() for 5/3 way valves

ATEX drawings

SXE957*-I models Single end Solenoid pilot valves

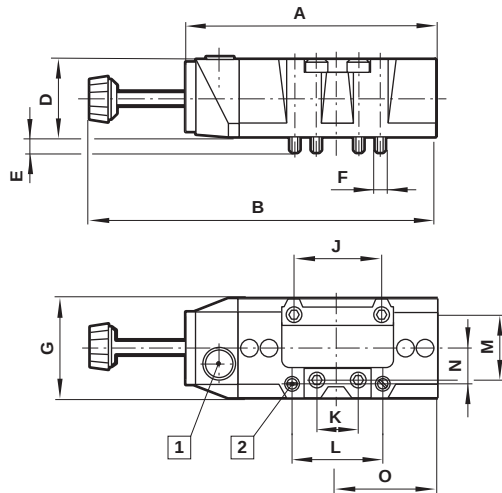①



Single end Solenoid pilot valves


ISO size	A	B	D	E	F	G	H	J
1	107	144	33	7,5	M5	42	22	36
2	135	173	42	8	M6	55	22	48
3	158	197	43	11,5	M8	62,5	22	64
ISO size	K	L	M	N	O	kg	Model	
1	18	38	28	15	42	0,33	SXE9573-1...	
2	24	48	38	20	53	0,59	SXE9574-1...	
3	32	-	48	-	65,5	0,85	SXE9575-1...	

Dimensions in mm
Projection/First angle



SXE057*-I and SXE9*7*-I models Double end Solenoid pilot valves

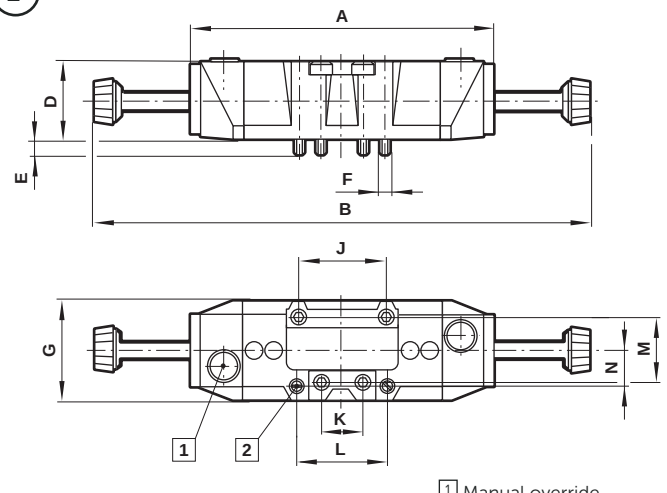②




① Manual override
② Flow regulators

Double end Solenoid pilot valves

ISO size	A	B	D	E	F	G	H	J	K
1	129	204	33	7,5	M5	42	22	36	18
2	163	239	42	8	M6	55	22	48	24
3	185	263	43	11,5	M8	62,5	22	64	32
ISO size	L	M	N	O	kg	Model			
1	38	28	15	42	0,45	SXE0573-1..., SXE9.73-1...			
2	48	38	20	53	0,72	SXE0574-1..., SXE9.74-1...			
3	-	48	-	65,5	0,96	SXE0575-1..., SXE9.75-1...			

SXP957* models Single Air pilotvalve

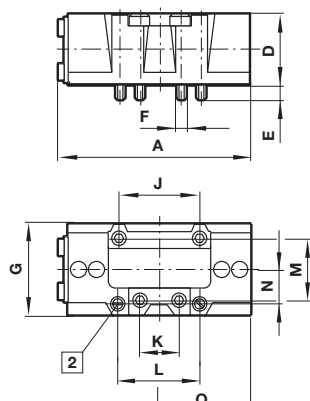
⑤



ISO size	A	D	E	F	G	J	K	M	kg	Model
1	92,5	33	7,5	M5	42	36	18	28	0,3	SXP9573-170-00
2	118	42	7	M6	55,5	48	24	38	0,5	SXP9574-170-00
3	134	43	11,5	M8	62,5	64	32	48	0,7	SXP9575-170-00

SXP057*, SXP967*, SXP977* models Double Air pilotvalve

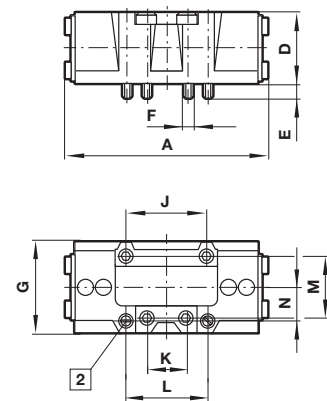
⑥



ISO size	A	D	E	F	G	J	K	M	kg	Model
1	88,5	33	7,5	M5	42	36	18	28	0,2	SXP0573-170-00
1	92,5	33	7,5	M5	42	36	18	28	0,3	SXP9.73-170-00
2	111	42	7	M6	55,5	48	24	38	0,4	SXP0574-170-00
2	118	42	7	M6	55,5	48	24	38	0,5	SXP9.74-170-00
3	134	43	11,5	M8	62,5	64	32	48	0,7	SXP0575-170-00
3	134	43	11,5	M8	62,5	64	32	48	0,7	SXP9.75-170-00

Accessories for ISO G parallel and NPT threads


Flow regulator plate

Symbol	ISO size	Regulated port	Operation	Inlet pressure max. (bar)	Weight (kg)	Model
	3	3 and 5	Piston regulator	-0,9 ... 16	0,86	CQM/22354/3/26


Application:
Regulation of exhaust ports 3 and 5 allows easy cylinder speed control.

Note:
The regulator screw can be locked with the lock nut.

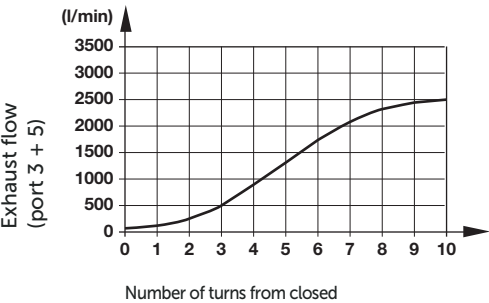Flow characteristics (inlet pressure: 8 bar)



Dimensions

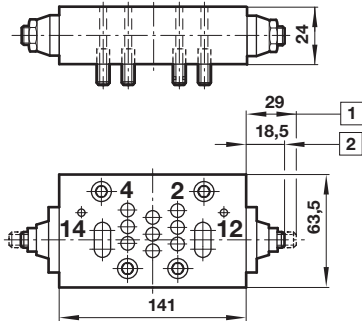

- 1 Fully open
- 2 Fully closed

Dimensions in mm
Projection/First angle



ATEX permissible accessories

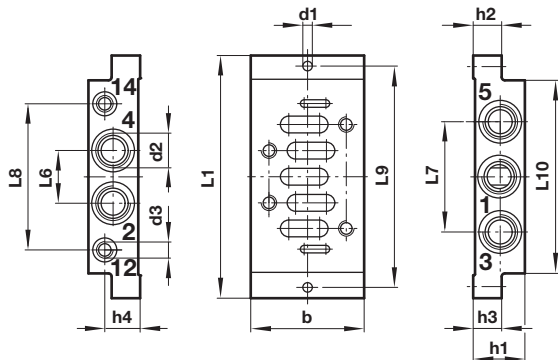
Following accessories of the ISO*STAR series are applicable in Ex zones 1, 2, 21 and 22:
Sub-bases and end plates

Dimensions in mm
Projection/First angle



VDMA 24345 sub-base options

Single station sub-base side ported (Form A)
for ISO G and NPT threads




ISO size	b	d1	d2	d3	h1	h2	h3	Model
1	48	5,5	1/4"	1/8"	32	10	10,5 (21,5)	#/P19126
2	57	6,6	3/8"	1/8"	40	13	14 (26)	#/P19132
3	71	6,6	1/2"	1/8"	32	18	179	#/P19138

ISO size	h4	L1	L6	L7	L8	L9	L10	kg	Model
1	23,5	110	24	43	58	98	84	0,16	#/P19126
2	30	124	30	56	74	112	95	0,28	#/P19132
3	22	149	32	68	90	136	119	0,36	#/P19138

() Dimension for ports 3 and 5.

Insert 'M' for ISO G parallel or 'C' for NPT threads

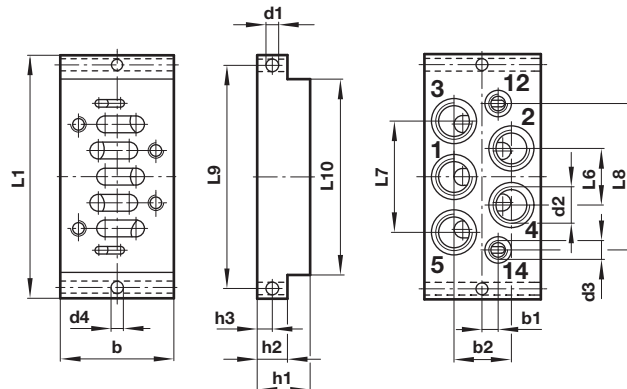
Single station sub-base
bottom ported (Form B)
for ISO G and NPT threads



ISO size	b	b1	b2	d1	d2	d3	d4	h1	Model
1	46	7	23	5,5	1/4"	1/8"	5,5	30	#/P19125
2	56	8	27	6,6	3/8"	1/8"	6,6	35	#/P19131
3	71	10	34	6,6	1/2"	1/8"	6,69	32	#/P19137

ISO size	h2	h3	L1	L6	L7	L8	L9	L10	kg	Model
1	10	5	110	23	46	62	98	84	0,19	#/P19125
2	13	6,5	124	28	56	73	112	95	0,32	#/P19131
3	18	9	149	34	68	90	136	119	0,40	#/P19137

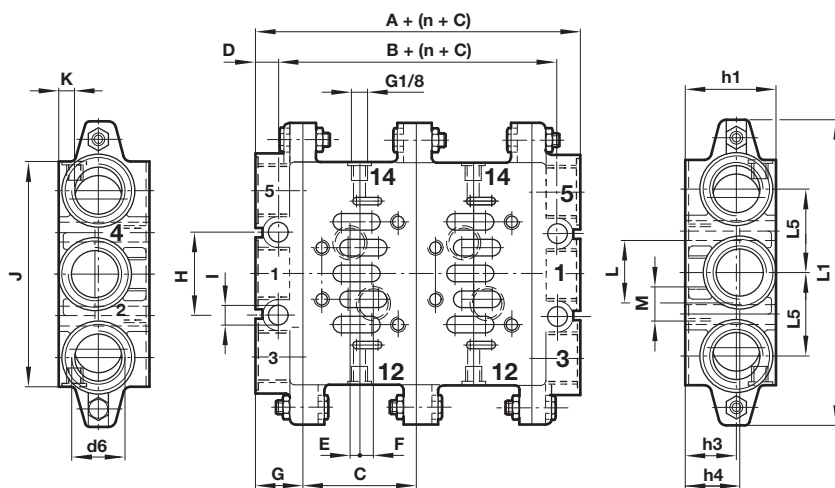Modular sub-bases (Form C) and end plates (Form D) for ISO G




ISO size	A	B	C	D	E	F	G	H	I	kg	Model ISO G thread
1	44	22	43	11	1,5	7,5	22	28	7	0,24	CQM/22152/3/21
2	52	26	56	13	5	6	26	35	9	0,36	CQM/22253/3/21
3	60	30	71	15	6	8	30	52	12	0,72	CQM/22354/3/21

ISO size	J	K	L	M	h1	h3	h4	L1	L5	d6	kg	Model ISO G thread
1	85	8,5	26	G1/4	46	21	24	110	28	3/8"	0,22	CQM/22152/3/22
2	100	9	30	G3/8	47	22	24	135	28	1/2"	0,34	CQM/22253/3/22
3	140	10	38	G1/2	56	31	34	190	52	1"	0,66	CQM/22354/3/22


Blanking plate for VDMA & universal
sub-bases with ISO G and NPT threads

Dimensions in mm
Projection/First angle




ISO size	b	L	h1	h2	h3	kg	Model
1	42	80	2	14	11	0,05	CQM/22152/3/23
2	55	85	2,5	12,5	13,5	0,09	CQM/22253/3/23
3	70	106	2,5	12,5	15,5	0,26	CQM/22354/3/23

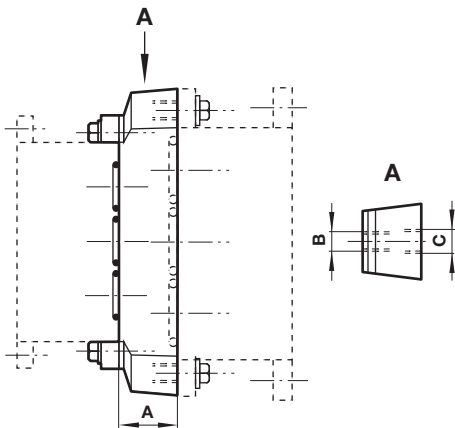Transition plate from ISO 1 » ISO 2, ISO 2 » ISO 3 and
ISO1 » ISO 3 for VDMA sub-bases for ISO G and
NPT threads



ISO size	A	B	C	kg	Model
1 » 2	25	M5	M6	0,35	CQM/22152/3/24
2 » 3	40	M6	M8	0,65	CQM/22253/3/24

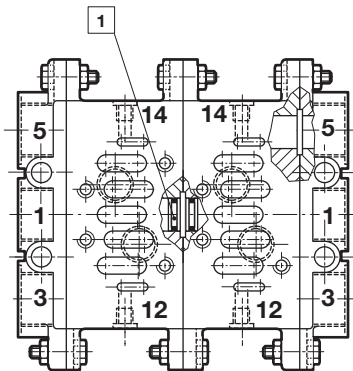
Blanking disc
FP8382, FP8482 & FP8582 for ISO G thread



1 Blanking disc; FP8*82

Universal sub-base options for ISO G threads only

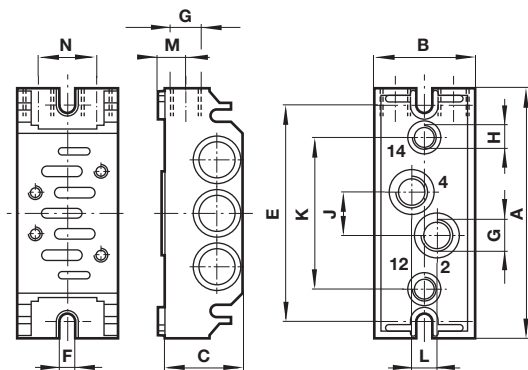Modular base with side and bottom ports open




ISO size	A	B	C	E	F	G	H	J	K	L	M	N	kg	Model
1	106	43	36	92	5,5	G1/4	G1/8	18	64	11	12	28	0,16	CQM/22152/3/27
2	120	56	43	102	6,5	G3/8	G1/8	24	68	19	15	38	0,35	CQM/22253/3/27

Screws, nuts, seals and plugs for ports 2 & 4 are in scope of delivery.


Transition plate from ISO 1 » ISO 2

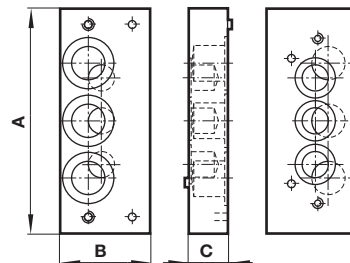Dimensions in mm
Projection/First angle



ISO size	A	B	C	kg	Model
1 » 2	114	46	20	0,23	CQM/22152/3/29

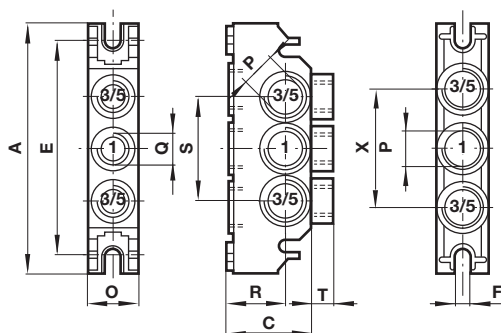Universal end plate, all ports blocked




ISO size	A	C	E	F	O	P	Q	R	S	T	X	kg	Model
1	106	36	92	5,5	22	G3/8	G1/4	25	44	9	50	0,13	CQM/22152/3/28
2	120	46	102	6,5	29	G1/2	G1/4	31	58	7	58	0,23	CQM/22253/3/28

Drill dimensions for opening ports

G1/4	Ø 8
G3/8	Ø 15
G1/2	Ø 15

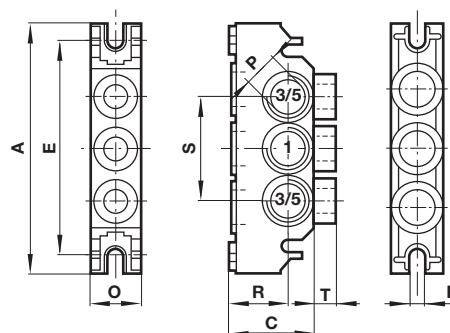Universal end plate, side ports open




ISO size	A	C	E	F	O	P	R	S	T	kg	Model
1	106	36	92	5,5	22	G3/8	25	44	9	0,13	CQM/22152/3/31
2	120	46	102	6,5	29	G1/2	31	58	7	0,23	CQM/22253/3/31

Drill dimensions for opening ports



G1/4	Ø 8
G3/8	Ø 15
G1/2	Ø 15

Blanking disc for ISO 1 and ISO 2 universal sub-bases

ISO size	kg	Model
1	0,01	M/P43173
2	0,03	M/P43174

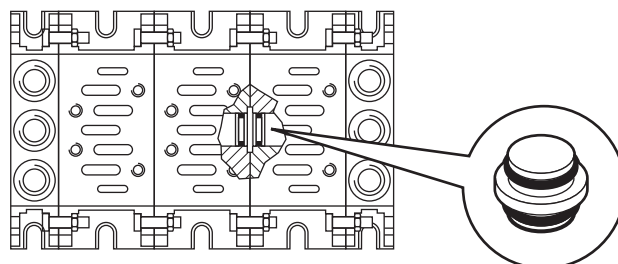



Sandwich single pressure regulator plate with pressure regulator on port 1

Symbol	ISO size	Regulator on side	Operation	Inlet pressure max. (bar)	Pressure range (bar)	Weight (kg)	Model
	1	14	Membrane pressure regulator with relieving valve	16	0,5 ... 12	0,6	V71010-KB1
	1	12	Membrane pressure regulator with relieving valve	16	0,5 ... 12	0,6	V71011-KB1

Application:
Pressure of port 1 can be regulated individually by using this intermediate plate.

Note:
Adjustment knob has push to lock feature.


Sandwich single pressure regulator plate with pressure regulator on port 2 or port 4

Symbol	ISO size	Regulated port	Operation	Inlet pressure max. (bar)	Pressure range (bar)	Weight (kg)	Model
	1	2	Membrane pressure regulator with relieving valve	16	0,5 ... 12	0,39	V71012-KB2
	1	4	Membrane pressure regulator with relieving valve	16	0,5 ... 12	0,39	V71012-KB3


Application:
Pressure of port 2 and 4 can be regulated individually by using this intermediate plate.

Note:
Adjustment knob has push to lock feature.

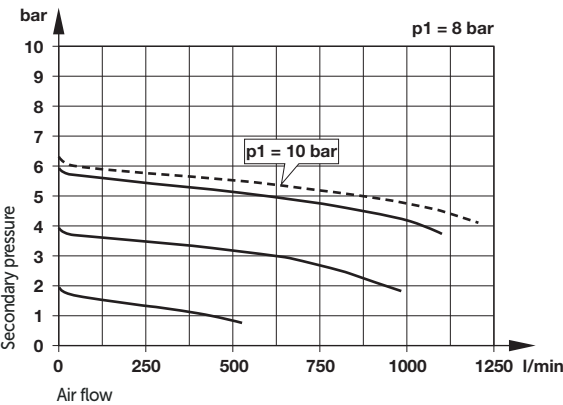
Flow characteristics (inlet pressure: 8 bar)



Dimensions:

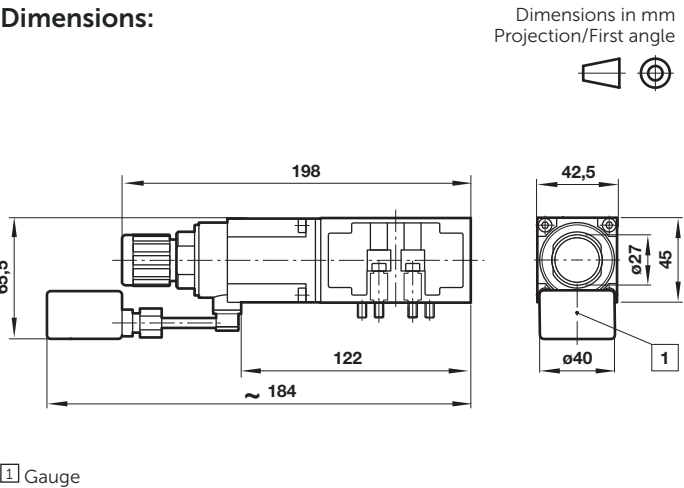

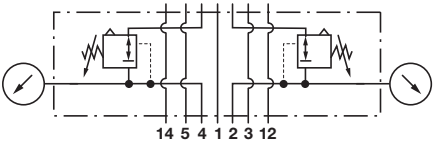
Sandwich double pressure regulator plate with double pressure regulator on port 2 and 4

Symbol	ISO size	Regulated port	Operation	Inlet pressure max. (bar)	Pressure range (bar)	Weight (kg)	Model
	1	2 and 4	Membrane pressure regulator with relieving valve	16	0,5 ... 12	0,39	V71012-KB4


Application:
Pressure of ports 2 and 4 can be regulated individually by using one of the intermediate plates.

Note:
Adjustment knob has push to lock feature.

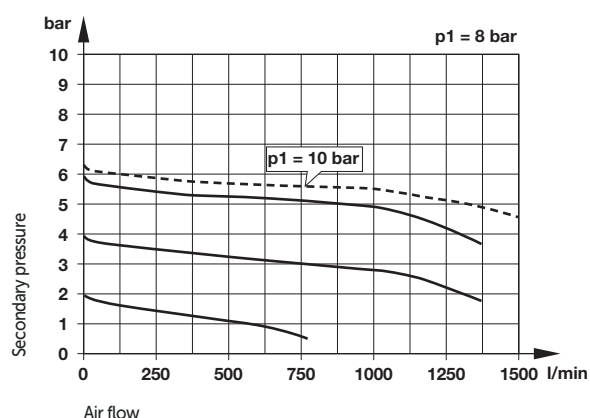Flow characteristics (inlet pressure: 8 bar)



Dimensions:

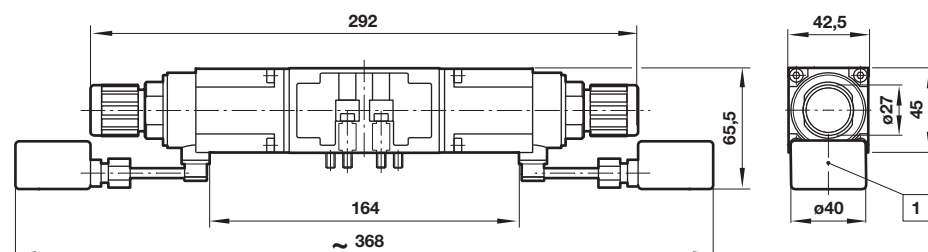


Dimensions in mm
Projection/First angle



1 Gauge

Accessories for ISO G parallel and NPT threads - non ATEX

Sandwich plate with check valves

Symbol	ISO	Design	Flow (l/min)	Operating pressure (bar)	Weight (kg)	Model
	1	Poppet valves	500	3 ... 8	0,45	FP7050
	3	Poppet valves	3400	3 ... 8	2,05	FP7070

Application:

With this type of intermediate plate together with a 5/3-way valve, center position open, a piston movement can be stopped in any desired position. This position will be kept during a long period.


Note:

Metal to metal sealed spool and sleeve valves have always a small amount of leak because of its design. Therefore 5/3-way valves, center position closed, are only applicable for short stops.

Caution: Not suitable for safety applications!

Dimensions

Dimensions in mm
Projection/First angle



ISO	A	B	C	Model
1	96	42	52	FP7050
3	165	62	95	FP7070

Warning

These products are intended for use in industrial compressed air systems only. Do not use these products where pressures and temperatures can exceed those listed under »Technical features/data«. Before using these products with fluids other than those specified, for non-industrial applications, life-support systems or other applications not within published specifications, consult Norgren.

Through misuse, age, or malfunction, components used in fluid power systems can fail in various modes.

The system designer is warned to consider the failure modes of all component parts used in fluid power systems and to provide adequate safeguards to prevent personal injury or damage to equipment in the event of such failure.

System designers must provide a warning to end users in the system instructional manual if protection against a failure mode cannot be adequately provided.

System designers and end users are cautioned to review specific warnings found in instruction sheets packed and shipped with these products.